



Division of
TennCare

Health Care
Innovation Initiative



Detailed Business Requirements

Colposcopy Episode

V9.1

Table of Contents

- Table of Contents 1**
- 1 Introduction..... 3**
 - 1.1 *Versions and revisions* 3
 - 1.2 *Scope of this document* 4
- 2 Colposcopy episode description 8**
 - 2.1 *Typical patient journey* 8
 - 2.2 *Sources of value*..... 9
 - 2.3 *Design dimensions*..... 10
 - 2.3.1 *Identify episode triggers*..... 10
 - 2.3.2 *Attribute episodes to providers* 11
 - 2.3.3 *Determine the episode duration* 11
 - 2.3.4 *Identify claims included in episode spend* 12
 - 2.3.5 *Calculate non-risk-adjusted episode spend* 14
 - 2.3.6 *Identify excluded episodes* 15
 - 2.3.7 *Perform risk adjustment* 16
 - 2.3.8 *Determine quality metrics performance* 17
 - 2.3.9 *Calculate gain/risk sharing amounts* 18
- 3 Episode data flow..... 21**
 - 3.1 *Input data*..... 22
 - 3.2 *Episode algorithm and detailed description* 24
 - 3.3 *Configuration file*..... 24
 - 3.4 *Output tables* 25
 - 3.4.1 *Episode output table* 25
 - 3.4.2 *PAP output table* 31
- 4 Episode agnostic algorithm logic 36**
 - 4.1 *Identify episode triggers* 36
 - 4.1.1 *Identify potential triggers*..... 36
 - 4.1.2 *Identify episode triggers based on clean period*..... 40
 - 4.1.3 *Setting output fields* 41
 - 4.2 *Attribute episodes to providers*..... 42
 - 4.3 *Determine the episode duration*..... 45
 - 4.4 *Identify claims included in episode spend*..... 49

4.5	<i>Calculate non-risk-adjusted Episode spend</i>	51
4.6	<i>Identify excluded episodes</i>	52
4.7	<i>Perform risk adjustment</i>	57
4.8	<i>Determine quality metrics performance</i>	58
4.9	<i>Calculate gain/risk sharing amounts</i>	59
5	Colposcopy episode detailed description	62
5.1	<i>Identify episode triggers</i>	62
5.2	<i>Attribute episodes to providers</i>	62
5.3	<i>Determine the episode duration</i>	62
5.4	<i>Identify claims included in episode spend</i>	63
5.5	<i>Calculate non-risk-adjusted spend</i>	64
5.6	<i>Identify excluded episodes</i>	64
5.7	<i>Perform risk adjustment</i>	65
5.8	<i>Determine quality metrics performance</i>	66
5.9	<i>Calculate gain/risk sharing amounts</i>	73
6	Glossary	74

1 Introduction

1.1 VERSIONS AND REVISIONS

To keep track of the version of an episode used at any given time, a versioning system is employed:

- The versioning system is designed to discern between major and minor changes made to the DBR. Changes are reflected by the V0.0 design format.
- Major changes to the DBR will be reflected by an increase of 1.0. For example, V1.0 is the first version of the DBR. If a major change is made, version V2.0 will be released. Major changes include revisions to the algorithm, configuration file, or significant content updates to the DBR.
- Minor changes to the DBR will be reflected by an increase of 0.1. For example, V1.0 is the first version of the DBR. If a minor change is made, version V1.1 will be released. Minor changes include revisions that do not impact the design or intent of the DBR (e.g., grammatical, formatting, etc).

Version	Date	Changes
V1.0	2018-06-08	<ul style="list-style-type: none">▪ First version
V2.0	2018-08-10	<ul style="list-style-type: none">▪ DBR: Updated section 2.3.6 to include overlapping episodes as a business exclusion▪ DBR: Updated section 4.4 for adjusting pharmacy claims included in episode spend
V2.1	2019-04-30	<ul style="list-style-type: none">▪ DBR: Updated section 4.6 to remove the acute gastroenteritis episode from the overlapping exclusion hierarchy since this episode has an extended preview period for 2019

V3.0	2019-12-13	<p>As part of the Episodes Design Feedback Session held on May 21, 2019:</p> <ul style="list-style-type: none"> ▪ DBR: Updated section 4.7 to include episodes new to performance in 2020: acute gastroenteritis, acute kidney and ureter stones, and cystourethroscopy. ▪ Configuration file: Add additional list of global exclusions that apply to all episodes. This list will exclude patients with rate, high-cost conditions, such as paralysis and coma.
V4.0	2020-12-18	<p>As part of the Episodes Design Feedback Session held on May 20, 2020:</p> <ul style="list-style-type: none"> ■ DBR: Updated Sections 2.3.6, 3.4.1, 4.6, and the Glossary to reflect that episodes for which the quarterback is an FQHC or RHC are excluded. ■ Configuration file: Removed codes under the “Business – FQHC/RHC” subdimension since the exclusion now occurs at the quarterback level.
V4.1	2021-09-03	<ul style="list-style-type: none"> ■ DBR: Updated section 2.3.6 to exclude episodes that have a diagnosis of COVID-19 or pneumonia due to COVID-19. ■ Configuration file: Add codes that define exclusion for COVID-19 and pneumonia due to COVID-19.
V5.0	2021-12-17	<p>As part of the Episodes Design Feedback Session held on May 19, 2021:</p> <ul style="list-style-type: none"> ■ DBR: An episode is excluded if the patient has a diagnosis related to COVID-19. ■ DBR: The ‘Difference in Average MED/day’ informational quality metric is updated to the percentage of valid episodes that have a difference in MED that is less than or equal to zero, as opposed to the average difference across all valid episodes.
V6.0	2022-12-29	<p>As part of the Episodes Design Feedback Session held on May 11, 2022:</p> <ul style="list-style-type: none"> ■ Configuration file: Removed invalidated codes and the addition of new or revised codes related to configuration file maintenance.

V7.0	2023-12-20	As part of the Episodes Design Feedback Session held on March 23, 2023: <ul style="list-style-type: none"> ■ Configuration file: Removal of invalidated codes and the addition of new or revised codes related to configuration file maintenance.
V8.0	2024-12-31	As part of the Episodes Design Feedback Session held on March 28, 2024: <ul style="list-style-type: none"> ■ Configuration file: Removal of invalidated codes and the addition of new or revised codes related to configuration file maintenance. ■ Configuration file and Summary reformatted for accessibility.
V9.0	2025-11-13	As part of the Episodes Design Feedback Session held on May 1, 2025: <p>Configuration file: Removal of invalidated codes and the addition of new or revised codes related to configuration file maintenance.</p>
V9.1	2026-05-21	Configuration file: Removal of invalidated codes and the addition of new or revised codes related to configuration file maintenance.

1.2 SCOPE OF THIS DOCUMENT

The Detailed Business Requirement (DBR) document serves as a guide to understand the definition of an episode.

Section 2 addresses the following questions:

- **Typical patient journey:** Which patient cases are addressed by the episode?
- **Sources of value:** At which points in the typical patient journey do providers have most potential to improve quality of care, outcomes, and cost-effectiveness?
- **Design dimensions:** What decisions underlie the design of the episode?
 - Identify episode triggers: What events trigger an episode?
 - Attribute episodes to providers: Which provider is primarily held accountable for the outcomes of an episode, i.e., Quarterback (QB) or Principal Accountable Provider (PAP)?

- Determine the episode duration: What is the duration of the episode?
- Identify claims included in episode spend: Which claims are included in or excluded from the episode spend?
- Calculate non-risk-adjusted episode spend: How is the spend for an episode calculated?
- Perform risk adjustment: What approach is taken to adjust episodes for risk factors that cannot be influenced by the Quarterback?
- Identify excluded episodes: Which episodes are excluded from a Quarterback’s average episode spend for the purposes of calculating any gain/risk sharing?
- Determine quality metrics performance: Which quality metrics are employed to inform Quarterbacks about their quality of care?
- Calculating gain and risk sharing: How are the gain and risk sharing amounts for Quarterbacks determined?

Section 3 of the DBR explains the data flow of an episode. It addresses the following questions:

- **Input data:** What inputs does the episode algorithm require to build the episode?
- **Episode algorithm and detailed description:** What is the intent of the episode design that needs to be reflected in the code to produce the episode outputs?
- **Configuration file:** What parameters (e.g., number of days) and medical codes (e.g., diagnosis codes) need to be specified to define the episode?
- **Output tables:** What are the recommended outputs of an episode algorithm?

Section 4 contains general elements of the episode algorithm that must be used in conjunction with section 5, as section 5 contains the specific details for the episode described in this DBR. Sections 4 and 5 used in conjunction explain the intent of the episode design at a level of granularity that will allow an IT implementation team to create an algorithm that matches the episode design. They may also be helpful to the analytics team in their communication with the IT team over the course of quality controlling an episode. These address the following questions:

- What are the logical steps the episode algorithm needs to complete in order to produce the required outputs?

- What cases does the algorithm need to address?
- Are there exceptions to the overall logic and how are they handled?
- Which algorithm logic is the same across episodes, and which is specific to an episode?

The DBR document does not cover the following topics:

- Background on how episodes compare to the current payment system
- Clinical rationale for inclusions and exclusions
- Intermediate analyses used during design of the episode
- Meeting materials used during design of the episode
- Guidance on data collection/transformation/storage
- Guidance on the episode algorithm coding approach


2 Colposcopy episode description

2.1 TYPICAL PATIENT JOURNEY

The episode described in this document pertains to patients who receive a colposcopy procedure. As depicted in Exhibit 1, the patient journey begins when a patient’s cervical cancer screening shows abnormal results. The colposcopy episode begins when the colposcopy is performed with or without biopsy, curettage, loop electrode excision (LEEP), and/or conization. Tissue samples may be sent to pathology for histologic confirmation of findings.

After the procedure, the patient may undergo follow-up with the gynecologist or other providers to assess management options for cervical dysplasia. The patient may be referred for an excision treatment (LEEP or conization) to remove lesions. Complications such as pain, bleeding, and infection may occur after an excision.

EXHIBIT 1 – TYPICAL PATIENT JOURNEY

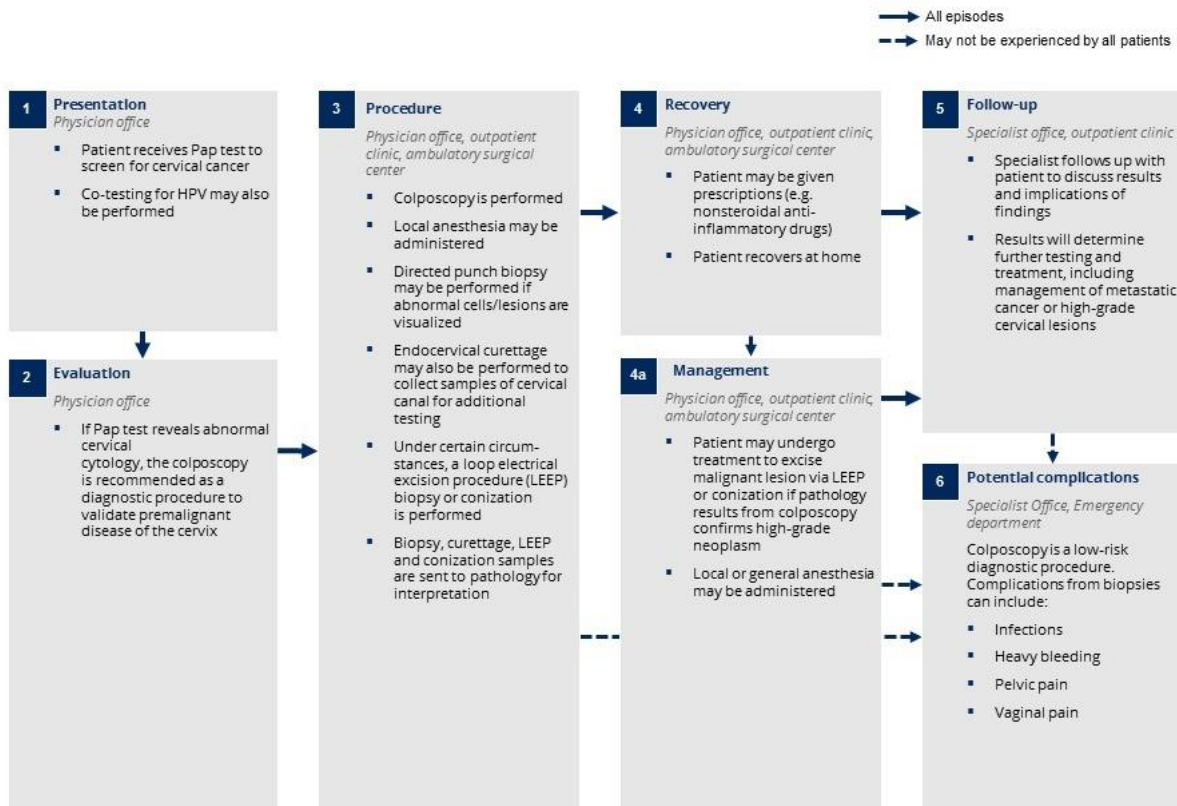

2.2 SOURCES OF VALUE

Among patients undergoing colposcopy, providers have several opportunities to improve the quality and cost of care, as depicted in Exhibit 2. Important sources of value include the provider’s decision to perform an excision or biopsy only when clinically indicated, appropriate use of anesthesia (e.g., nonsteroidal anti-inflammatory drugs instead of lidocaine), and appropriate site of care. Providers can also coordinate follow-up care to decide next steps for management of findings. By adhering to clinically appropriate care guidelines, providers have the opportunity to improve quality and decrease costs.


EXHIBIT 2 – SOURCES OF VALUE



2.3 DESIGN DIMENSIONS

Designing and building a colposcopy episode comprises nine dimensions, as shown in Exhibit 3. Section 3 provides additional details on the episode data flow.

EXHIBIT 3 – DESIGN DIMENSIONS

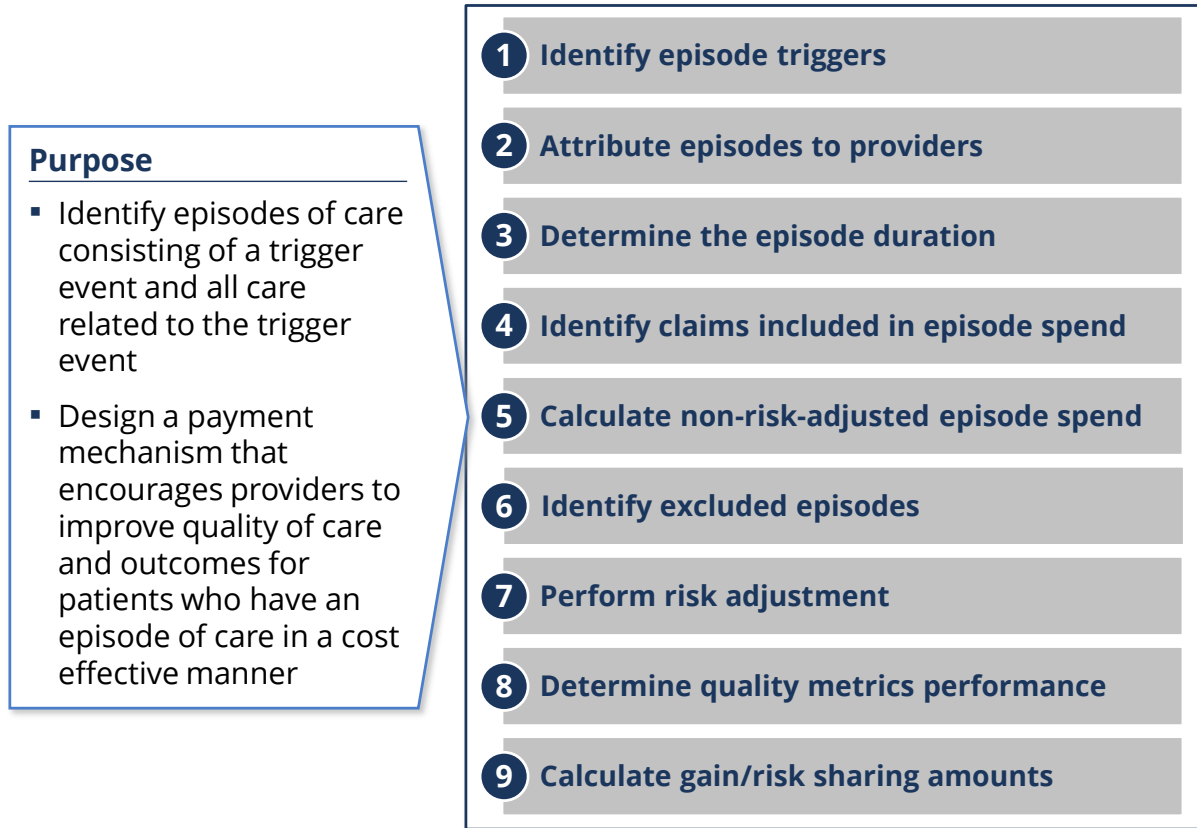

2.3.1 Identify episode triggers

A potential trigger for a colposcopy episode is either:

- A professional claim for colposcopy with an outpatient facility claim that has a diagnosis code related to the colposcopy, OR
- A professional claim for colposcopy with place of service indicating office setting

To avoid an overlap of colposcopy episodes, no potential trigger can become an episode trigger during another episode for a given patient, i.e., a potential trigger is excluded for being in the clean period of any episode trigger. A chronological approach is taken, and the first potential trigger of a given patient is identified as the earliest (i.e., the furthest in the past) episode trigger.

2.3.2 Attribute episodes to providers

The Quarterback (also referred to as the Principal Accountable Provider, or PAP) is the provider deemed to be in the best position to influence the quality and cost of care for a patient during a colposcopy – here, the provider or provider group who performed the colposcopy. The contracting entity or tax identification number of the professional trigger claim is used to identify the Quarterback.


2.3.3 Determine the episode duration

The duration of the colposcopy episode comprises the trigger window and the post-trigger window, as shown in Exhibit 4. Overall, the duration of the episode is referred to as the episode window.

- **Pre-trigger window:** This episode has no pre-trigger window.
- **Trigger window:** The trigger window spans the duration of the triggering procedure and associated stay.
- **Post-trigger window:** The post-trigger window begins the day after the trigger window and extends for 90 days.

If a relevant hospitalization begins on or before the 90th day of the post-trigger window and extends beyond the 90th day (i.e., is ongoing on the 91st day of the post-trigger window), then the post-trigger window is extended until discharge from the hospitalization. Extending the episode in this way may only occur once per window and does not lead to further extensions. See section 6 for the definition of hospitalization.

EXHIBIT 4 – EXAMPLE OF DETERMINING THE EPISODE DURATION

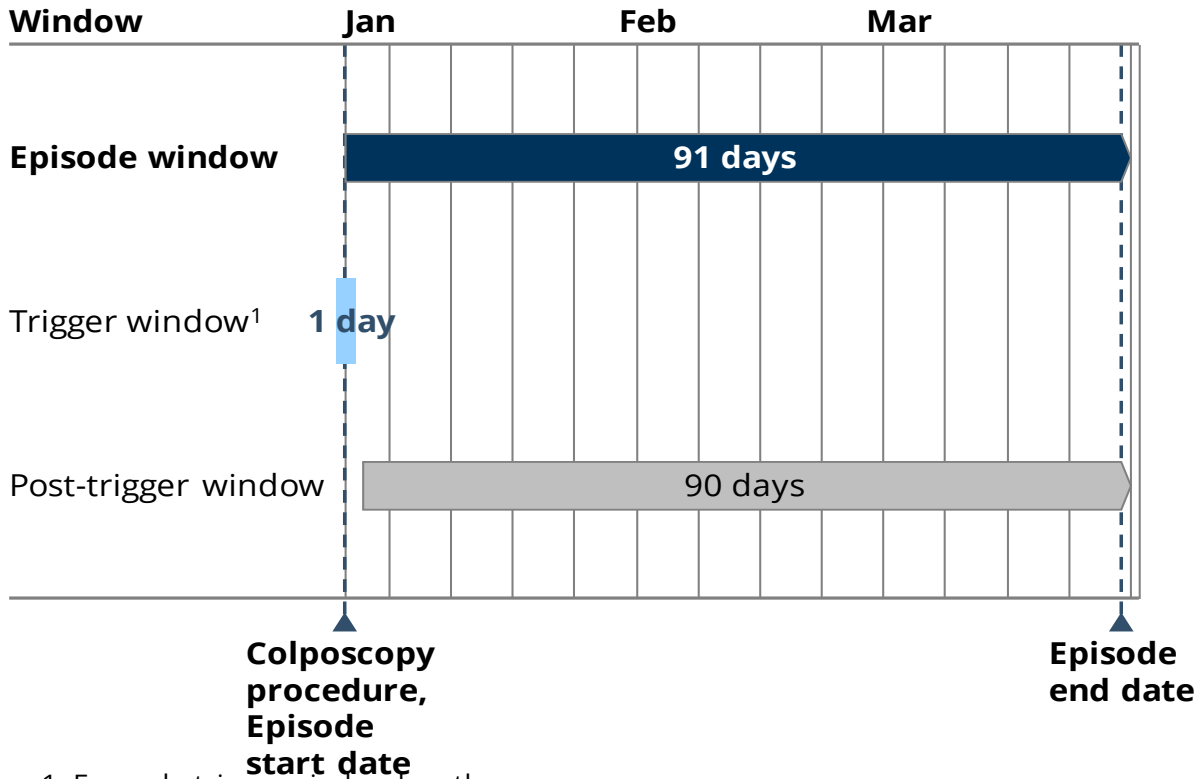

1. Example trigger window length

2.3.4 Identify claims included in episode spend

Episode spend is calculated on the basis of claims related to the colposcopy. Claims or claim detail lines that are included in the calculation of the episode spend are referred to as included claims or included claim detail lines. The criteria to identify included claims or claim detail lines depend on the type of service they belong to, as well as the time window during which a claim occurs. The following types of service are included in the episode:

Pre-trigger window

This episode has no pre-trigger window.

Trigger window

For this episode, claims and claim detail lines assigned to the trigger window are included if they are also assigned to one of the following types of services:

- **Care for specific diagnoses:** Outpatient, professional, inpatient, and long-term care claims with ICD-10 diagnosis codes for specific diagnoses related to the colposcopy (e.g., abnormal Pap smear with high-grade squamous intraepithelial lesion) are included in the trigger window.
- **Specific anesthesia:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific anesthesia related to the colposcopy are included in the trigger window.
- **Specific imaging and testing:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific imaging and testing related to the colposcopy (e.g., surgical pathology) are included in the trigger window.
- **Specific medications:** Pharmacy claims with HIC3 medication codes for specific medications related to the colposcopy (e.g., analgesics) are included in the trigger window.
- **Specific pathology:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific pathology related to the colposcopy (e.g. surgical pathology) are included in the trigger window.
- **Specific surgical and medical procedures:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific procedures related to the colposcopy (e.g., LEEP) are included in the trigger window.
- **Specific excluded surgical and medical procedures:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific excluded procedures (e.g., HPV vaccines) are excluded from the trigger window.

Post-trigger window

For this episode, claims and claim detail lines assigned to the post-trigger window are included if they are also assigned to one of the following types of services:

- **Care for specific diagnoses:** Outpatient, professional, inpatient, and long-term care claims with ICD-10 diagnosis codes for specific diagnoses related to the colposcopy (e.g., moderate cervical dysplasia) are included in the post-trigger window.
- **Specific anesthesia:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific anesthesia related to the colposcopy are included in the post-trigger window.
- **Specific imaging and testing:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific imaging and testing related to the colposcopy (e.g., pelvic ultrasound) are included in the post-trigger window.
- **Specific medications:** Pharmacy claims with HIC3 medication codes for specific medications related to the colposcopy (e.g., analgesics) and treatment for complications (e.g., antibiotics) related to the colposcopy are included in the post-trigger window.
- **Specific pathology:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific pathology related to the colposcopy (e.g. surgical pathology) are included in the post-trigger window.
- **Specific surgical and medical procedures:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific procedures related to the colposcopy (e.g., LEEP) are included in the post-trigger window.
- **Specific excluded surgical and medical procedures:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific excluded procedures (e.g. HPV vaccines) are excluded from the post-trigger window.

2.3.5 Calculate non-risk-adjusted episode spend

The episode spend is the amount that reflects the totality of all costs included in the episode. The episode spend reflects the paid amount plus patient cost share for included claims. Since the totality of spend for included claims is not risk-adjusted, it is referred to as non-risk-adjusted episode spend.

2.3.6 Identify excluded episodes

Episode exclusions ensure that episodes are comparable to each other and allow fair comparisons between patient panels. After all exclusions that identify invalid episodes have been applied, a set of valid episodes remains. The valid episodes form the basis to assess the performance of Quarterbacks.

■ Business exclusions

- **Inconsistent enrollment:** An episode is excluded if there are gaps in the plan coverage of the patient during the episode window.
- **Third-party liability:** An episode is excluded if an inpatient, outpatient, professional, pharmacy, or long term care claim that is assigned to the episode window (included or not included) is associated with a third-party liability amount.
- **Dual eligibility:** An episode is excluded if a patient has dual coverage by Medicaid and Medicare at any time during the episode window.
- **FQHC/RHC:** An episode for which the quarterback is an FQHC or RHC is excluded.
- **No PAP ID:** An episode is excluded if it cannot be associated with a corresponding PAP ID.
- **Incomplete episodes:** An episode is excluded if either:
 - The triggering professional claim detail lines included in episode spend are less than or equal to 0, OR
 - It is within the bottom 2.5% of all episodes with the lowest non-risk-adjusted episode spend (not the risk-adjusted episode spend), without taking into account episodes where the triggering professional claim spend is less than or equal to (\leq) 0.
- **Overlapping episodes:** An episode **may be** excluded if its included spend overlaps with another episode during their episode windows where the same Principal Accountable Provider is serving the same patient. The exclusion rule follows a set of conditions outlined in detail in Section 4.6.

■ Clinical exclusions

- **Different care pathway:** An episode is excluded if the patient has one or more conditions that would lead to a different care pathway. Codes that indicate a different care pathway are searched for an inpatient, outpatient, and professional

claims (included or not included) during a specified length of time, as detailed in the configuration file. The complete list of conditions or procedures that would lead to a different care pathway are:

- COVID-19
- Department of Children’s Services (DCS) custody
- Cervical cancer
- Hysterectomy
- Pregnancy

■ Patient exclusions

- **Age:** An episode is excluded if the patient is older than 64 (>64) years of age on the day of the triggering event, or younger than 13 (<13) years of age on the day of the triggering event. See section 6 for the definition of member age.
- **Death:** An episode is excluded if the patient has a patient discharge status of “expired” on any inpatient or outpatient claim assigned to the episode window. The claim may be an included claim or not.
- **Left Against Medical Advice:** An episode is excluded if a patient has a discharge status of “left against medical advice or discontinued care” on any inpatient or outpatient claim during the episode window. The claim may be an included claim or not.

■ High-cost outlier

- An episode is excluded if the risk-adjusted episode spend (not the non-risk-adjusted episode spend) is greater than the high outlier threshold. The high outlier threshold is set at three standard deviations above the average risk-adjusted episode spend for valid episodes. This threshold will be finalized at the same time as the gain and risk sharing thresholds. Because this exclusion uses the risk-adjusted episode spend, it is the only exclusion that takes place after the risk adjustment process.

2.3.7 Perform risk adjustment

Quarterbacks are compared based on their performance on quality metrics and based on the average spend for their episodes. Risk adjustment is one of the mechanisms used to achieve a fair comparison in episode spend across Quarterbacks.

Risk factors and risk coefficients are identified using a statistical model that tests for correlation between factors and episode cost. The estimated risk coefficients are used to calculate a risk score for each episode given the risk factors that are present for the episode. The non-risk-adjusted episode spend is adjusted by the risk score to arrive at the risk-adjusted episode spend.

The final risk adjustment methodology decisions will be made at the discretion of the payer after analyzing the data. Because each payer runs its own risk adjustment model based on cost and there are variations in the population covered by each payer, the significant risk factors may vary across payers.

2.3.8 Determine quality metrics performance

A Quarterback must pass all quality metrics tied to gain sharing to be eligible for gain sharing. Quarterbacks receive information on additional quality metrics that allow them to assess their performance but that do not affect their eligibility to participate in gain sharing. The quality metrics are based on information contained in the claims filed for each patient, and some might be based on other information sources. Risk sharing is not dependent on the Quarterback meeting any quality metrics. Setting thresholds for the quality metrics is beyond the scope of this DBR hence thresholds will be set and provided separately.

- **Quality metrics tied to gain sharing** (also referred to as threshold quality metrics):
 - LEEP utilization under 26 years old with no evidence of high grade dysplasia: Percentage of valid episodes ages <26 and no evidence of high grade dysplasia with a LEEP or conization during the episode window (lower rate indicative of better performance)
 - LEEP utilization with low-grade dysplasia: Percentage of valid episodes with a LEEP or conization during the episode window with a dysplasia diagnosis of CIN 1 or below (lower rate indicative of better performance)
- **Quality metrics not tied to gain sharing** (i.e., included for information only):
 - Cervical cancer screening: Percentage of valid episodes with a cervical cancer screening within 90 days prior to the triggering colposcopy (higher rate indicative of better performance)
 - Diagnostic colposcopy: Percentage of valid episodes with a diagnostic colposcopy during the post-trigger window (lower rate indicative of better performance)

- LEEP utilization, trigger: Percentage of valid episodes with a LEEP or conization during the trigger window (rate not indicative of performance)
- LEEP utilization, episode: Percentage of valid episodes with a LEEP or conization during the episode window (rate not indicative of performance)
- Difference in average MED¹/day: Percent of valid episodes where the average difference in MED/day between opioid prescriptions during the episode window and for 1 to 60 days before the trigger window, across valid episodes, is less than or equal to zero (higher value indicative of better performance)
- Average MED/day during pre-trigger opioid window: Average MED/day for opioid prescriptions for 1 to 60 days before the trigger, across valid episodes (value not indicative of performance)
- Average MED/day during post-trigger opioid window: Average MED/day for opioid prescriptions for during the episode window, across valid episodes (value not indicative of performance)
- Opioid and benzodiazepine prescriptions: Percentage of valid episodes with both opioid and benzodiazepine prescriptions during the episode window (lower rate indicative of better performance)

2.3.9 Calculate gain/risk sharing amounts

During the initial implementation phase the payer will send provider reports to Quarterbacks to inform them about their performance in the episode-based payment model. At a future date, the performance period timing will be established.

The performance of Quarterbacks in the episode-based payment model will be linked to payments at the end of the annual performance period. The description below outlines the approach of linking Quarterbacks' performances to payments. Gain/risk sharing is determined based on the comparison of the average risk-adjusted episode spend of each

¹ MED: Morphine equivalent dose

Quarterback over the course of the performance period in three pre-determined thresholds. The thresholds and their meaning for gain or risk sharing are:

- **Acceptable threshold:** Quarterbacks with average risk-adjusted episode spend above the acceptable threshold owe a risk sharing payment.
- **Commendable threshold:** Quarterbacks with average risk-adjusted episode spend below the commendable threshold that meet the quality metrics tied to gain sharing receive a gain sharing payment.
- **Gain sharing limit threshold:** Quarterbacks with average risk-adjusted episode spend below the gain sharing limit threshold and that pass the quality metrics tied to gain sharing receive a gain sharing payment up to a specified limit.

Quarterbacks with average risk-adjusted episode spend between the acceptable and commendable thresholds neither owe a risk sharing payment nor receive a gain sharing payment.

The gain or risk sharing payment of each Quarterback is calculated based on episodes that ended during the performance period. Quarterbacks receive reports about their performance in the episode-based payment model every quarter. Payments are made once a year. All Quarterbacks (not only those with valid episodes) receive a provider report.

The payers and providers share a portion of the losses/gains in the episode-based payment model. The calculation of the gain or risk sharing payment is as follows:

- **Risk sharing:** Quarterbacks who owe a risk sharing payment pay 50% of the difference between the acceptable threshold and the average risk-adjusted episode spend of the Quarterback, multiplied by the number of valid episodes of the Quarterback in the reporting period.
- **Gain sharing:**
 - **Quarterbacks below the commendable threshold and above the gain sharing limit:** Quarterbacks receive 50% of the difference between the commendable threshold and the average risk-adjusted episode spend of the Quarterback, multiplied by the number of valid episodes of the Quarterback in the reporting period.
 - **Quarterbacks below the gain sharing limit:** Quarterbacks receive 50% of the difference between the commendable threshold and the gain sharing limit

threshold, multiplied by the number of valid episodes of the Quarterback in the reporting period.


3 Episode data flow

The analytics underlying an episode-based payment model are performed by an episode algorithm. The algorithm takes an input dataset, transforms the data in accordance with the intent of the episode design, and produces a set of output tables (Exhibit 5). The output tables are used to create provider reports.

Several of the episode design dimensions require input parameters such as age ranges, and medical codes such as diagnosis, procedure, and medication codes to specify the intent of the episode. The parameters and medical codes are provided in the configuration file.

It is recommended that the episode data flow includes two elements for quality assurance: (1) An input summary table to assess the content and quality of the input dataset (2) An output summary table to assess the content and quality of the output tables.

EXHIBIT 5 – EPISODE DATA FLOW

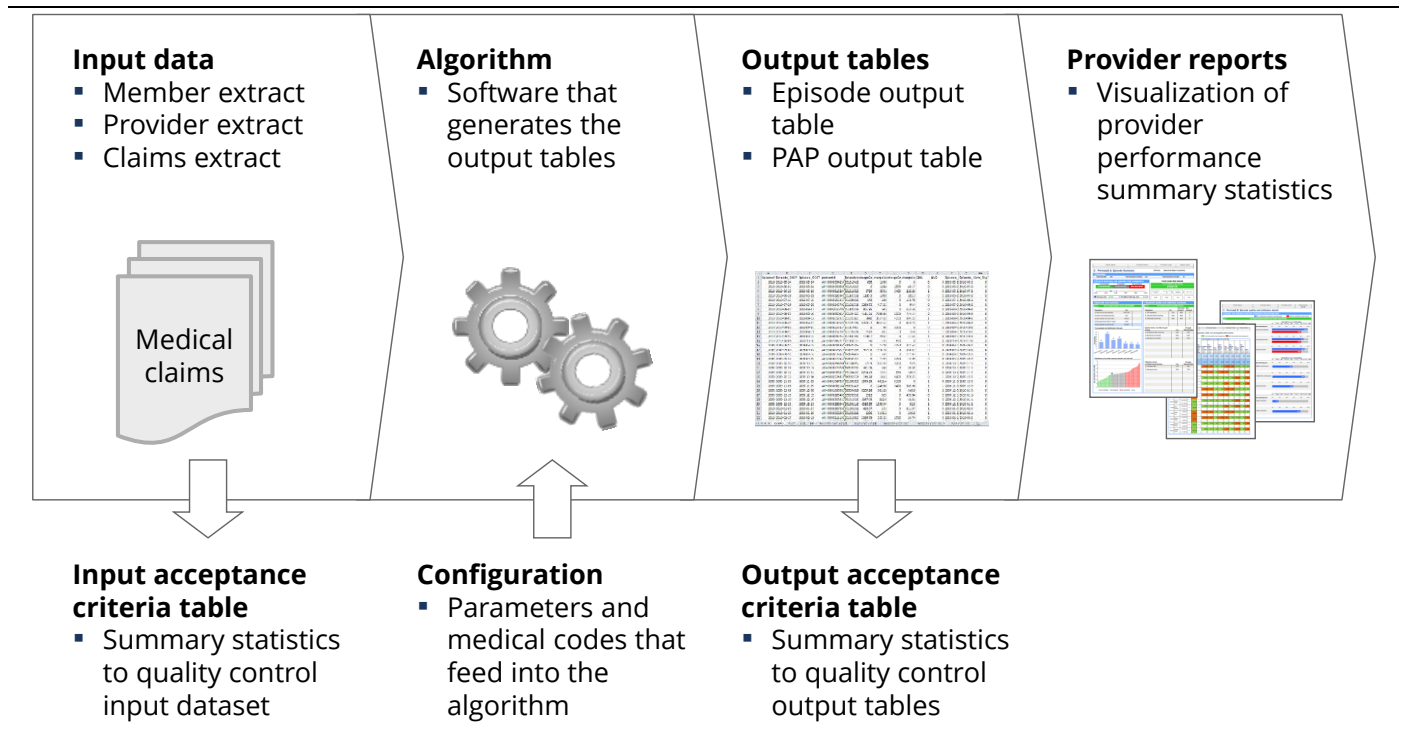

3.1 INPUT DATA

To build an episode, the following input data are needed:

- **Member Extract:** List of patients and their health insurance enrollment information.
- **Provider Extract:** List of participating providers and their addresses.
- **Claims Extract:** Institutional claims (UB-04 claim form), professional claims (CMS1500 claim form), and pharmacy claims (NCPDP claim form) at the patient level.

The table below lists the required input fields using the input data field names and a description of these. Sections 4 and 5 describe the use of each input field. In these sections, input fields are referred to by the “Source field name in DBR” and written in italics.

Table – Input data fields

Source field name in DBR	Description
Member Extract	
Member ID	Unique member identifier
Member Name	Member name
Eligibility Start Date	First date member is eligible for coverage by payer
Eligibility End Date	Last date member is eligible for coverage by payer
Date Of Birth	Member date of birth
Provider Extract	
Contracting Entity Name	Contracting entity name
Contracting Entity	Unique identifier of provider by contracting entity
Provider Name	Provider name
Provider ID	Unique identifier of provider
Claims Extract	
Internal Control Number	Unique claim identifier
Type Of Bill	Type of bill
Member ID	Unique member identifier
Billing Provider ID	Unique billing provider identifier
Detail Rendering Provider ID	Unique detail rendering provider identifier
Attending Provider NPI	Attending provider National Provider Identifier
Header From Date Of Service	Date on which service begins on claim header

Source field name in DBR	Description
Header To Date Of Service	Date on which service ends on claim header
Detail From Date Of Service	Date on which service begins on claim detail line
Detail To Date Of Service	Date on which service ends on claim detail line
Admission Date	Admission date
Patient Discharge Status	Patient discharge status
Header Diagnosis Code	All diagnosis codes on claim header
Header Surgical Procedure Code	All surgical procedure codes on claim header
Detail Procedure Code	Procedure code on claim detail line
All Modifiers	All procedure code modifiers on claim detail line
Place Of Service	Place of service
National Drug Code	National drug code
Quantity	Quantity of drug prescribed
Days supply	Days supply of drug prescribed
Header Paid Amount	Header paid amount
Detail Paid Amount	Detail paid amount
Header TPL Amount	Header third party liability amount
Detail TPL Amount	Detail third party liability amount
Revenue Code	Revenue code
Patient Cost Share	Patient cost share amount

The date range for the episode input data has to include claims which were submitted for services provided during the defined episode reporting period as well as for a predetermined period of time preceding the reporting period. The duration of this predetermined period is the length of the episode window (see section 5.3 for guidance) plus an additional 12 months. Claims from this additional period preceding the reporting period are needed to allow for identification of risk factors and comorbidities as well as to provide sufficient input data to identify the episode start date for the first episodes that end during the reporting period.

The input data has to contain only unique and paid claims. It is the responsibility of each payer to apply appropriate methods to ensure that all claims in the input data are valid, de-duplicated, and paid. Payers should use denied claims for the purpose of determining quality metrics performance.

If the value of an input field from the Claims Extract that is required to build an episode is missing or invalid, then the corresponding claim is ignored when building the episode. For example, a claim that would be a potential trigger, but is missing the *Header From Date Of Service*, cannot be a potential trigger.

3.2 EPISODE ALGORITHM AND DETAILED DESCRIPTION

The intent of the episode algorithm is detailed in the episode agnostic algorithm logic (section 4) and colposcopy episode detailed description (section 5) of the DBR. Section 4 contains general elements of the episode algorithm that must be used in conjunction with section 5, as section 5 contains the specific details for the episode described in this DBR.

3.3 CONFIGURATION FILE

The parameters and medical codes needed to define the episode are listed in the configuration file, which is provided as an attachment to the DBR. The file includes:

- **Parameters sheet:** Values for parameters used in the episode, for example the duration of the post-trigger window.
 - Episode: Name of episode, i.e., Colposcopy
 - Design Dimension: Episode design dimension, e.g., Determine The Episode Duration
 - Parameter Description: Description of the parameter, e.g., Duration Of Post-trigger Window
 - Parameter Value: Value of the parameter, e.g., 30
 - Parameter Unit of Measure: Unit of measure of the parameter, e.g., Days
- **Code sheet:** Medical codes used in the episode, such as trigger diagnosis or procedure codes, and codes to identify included claims. The columns contained in the code sheet are:
 - Episode: Name of episode, i.e., Colposcopy
 - Design Dimension: Episode design dimension, e.g., Perform Risk Adjustment
 - Subdimension: Grouping of codes used for a specific purpose within the design dimension, e.g., History of coagulation and hemorrhagic disorder
 - Time Period: Time for which the code is relevant, e.g., During the episode window and 365 days before episode start date

- Code Type: Code system to which the code belongs to, e.g., ICD-10 Dx
- Code Group: Code group level classification, e.g., Coagulation defects
- Code Description: Code detailed description, e.g., Von Willebrand disease
- Code: Code number, e.g., 2864

Sections 4 and 5 of the DBR explain the intended use of the parameters and medical codes by the episode algorithm. References to medical codes in the configuration file are made using the name for the relevant design dimension subcategory (subdimension) in the code sheet of the configuration file. References to parameters in the configuration file are made using the name for the relevant design dimension in the parameters sheet of the configuration file.

The code sheet may contain CPT codes. CPT is a registered trademark of the American Medical Association (AMA). Vendor purchases one single CPT distribution license for the configuration file of each episode that is delivered to a recipient. If its recipient wishes to further distribute a configuration file, it is the recipient's responsibility to comply with AMA CPT license requirement.

3.4 OUTPUT TABLES

Using the input data tables and the configuration file, an episode algorithm creates two output tables: the episode output table and the Principal Accountable Provider (also referred to as PAP or Quarterback) output table. The episode agnostic algorithm logic (section 4) and colposcopy episode detailed description (section 5) describe the definition of each output field. In these sections output fields are referred to by the output field names provided in the tables below and are written in italics.

3.4.1 Episode output table

The episode output table contains the set of episodes identified by the algorithm and the characteristics of each episode. The table “Episode Output Table” below lists the required output fields.

Table - Episode Output Table

Design dimension	Output field name	Report template name
	Episode identification	
1 - Identify episode triggers	Facility Trigger Claim ID	N/A
1 - Identify episode triggers	Facility Trigger Claim Type	N/A
1 - Identify episode triggers	Professional Trigger Claim ID	N/A
1 - Identify episode triggers	Member ID	N/A
1 - Identify episode triggers	Member Name	Patient Name
1 - Identify episode triggers	Member Age	N/A
1 - Identify episode triggers	Associated Facility Claim ID	N/A
1 - Identify episode triggers	Associated Facility Claim Type	N/A
2 - Attribute episodes to providers	PAP ID	Provider Code
2 - Attribute episodes to providers	Rendering Provider ID	N/A
2 - Attribute episodes to providers	Rendering Provider Name	N/A
3 - Determine the episode duration	Episode Start Date	Episode Start Date

Design dimension	Output field name	Report template name
3 – Determine the episode duration	Episode End Date	Episode End Date
3 – Determine the episode duration	Pre-Trigger Window Start Date	N/A
3 – Determine the episode duration	Pre-Trigger Window End Date	N/A
3 – Determine the episode duration	Trigger Window Start Date	N/A
3 – Determine the episode duration	Trigger Window End Date	N/A
3 – Determine the episode duration	Post-trigger Window Start Date	N/A
3 – Determine the episode duration	Post-trigger Window End Date	N/A
4 – Identify claims included in episode spend	Count of Included Claims	# Claims
	Episode spend	
5 – Calculate non-risk-adjusted spend	Non-risk-adjusted Episode Spend	Non-adjusted cost
5 – Calculate non-risk-adjusted spend	By Pre-trigger Window	N/A
5 – Calculate non-risk-adjusted spend	By Trigger Window	N/A
5 – Calculate non-risk-adjusted spend	By Post-trigger Window	N/A

Design dimension	Output field name	Report template name
5 – Calculate non-risk-adjusted spend	By Inpatient facility	Inpatient facility
5 – Calculate non-risk-adjusted spend	By Emergency department or observation	Emergency department or observation
5 – Calculate non-risk-adjusted spend	By Outpatient facility	Outpatient facility
5 – Calculate non-risk-adjusted spend	By Inpatient professional	Inpatient professional
5 – Calculate non-risk-adjusted spend	By Outpatient laboratory	Outpatient laboratory
5 – Calculate non-risk-adjusted spend	By Outpatient radiology	Outpatient radiology
5 – Calculate non-risk-adjusted spend	By Outpatient professional	Outpatient professional
5 – Calculate non-risk-adjusted spend	By Other	Other
5 – Calculate non-risk-adjusted spend	By Pharmacy	Pharmacy
	Exclusions	
6 – Identify excluded episodes	Any Exclusion	N/A
6 – Identify excluded episodes	Exclusion Inconsistent Enrollment	Patient was not continuously enrolled during episode window
6 – Identify excluded episodes	Exclusion Third-party Liability	Patient has third-party liability charges

Design dimension	Output field name	Report template name
6 – Identify excluded episodes	Exclusion Dual Eligibility	Patient has dual coverage of primary medical services
6 – Identify excluded episodes	Exclusion FQHC/RHC	Episodes for which the quarterback is an FQHC or RHC are excluded.
6 – Identify excluded episodes	Exclusion No PAP ID	N/A
6 – Identify excluded episodes	Exclusion Incomplete Episode	Episode data was incomplete
6 – Identify excluded episodes	Exclusion Left Against Medical Advice	Patient has a discharge status of “left against medical advice”
6 – Identify excluded episodes	Exclusion Age	Patients >/< [XX]
6 – Identify excluded episodes	Exclusion Death	Patient died in the hospital during the episode
6 – Identify excluded episodes	Exclusion Different Care Pathway	Risk factor / co-morbidity reference found
6 – Identify excluded episodes	Exclusion High Outlier	Episode exceed the high cost outlier threshold
6 – Identify excluded episodes	Exclusion Overlapping Episode	Episode has specific overlaps with other episodes
	Risk adjustment	
7 – Perform risk adjustment	Risk-adjusted Episode Spend	N/A

Design dimension	Output field name	Report template name
7 – Perform risk adjustment	Same breakdown as for Non-risk-adjusted Episode Spend	
7 – Perform risk adjustment	Risk Factor <risk factor number>	Episode risk factor
7 – Perform risk adjustment	Episode Risk Score	N/A
	Quality metrics	
8 – Determine quality metrics performance	Quality Metric 1 Indicator	LEEP utilization under 26 years old with no evidence of high grade dysplasia
8 – Determine quality metrics performance	Quality Metric 1 Denominator	LEEP utilization under 26 years old with no evidence of high grade dysplasia
8 – Determine quality metrics performance	Quality Metric 2 Indicator	LEEP utilization with low-grade dysplasia
8 – Determine quality metrics performance	Quality Metric 2 Denominator	LEEP utilization with low-grade dysplasia
8 – Determine quality metrics performance	Quality Metric 3 Indicator	Cervical cancer screening
8 – Determine quality metrics performance	Quality Metric 4 Indicator	Diagnostic colposcopy
8 – Determine quality metrics performance	Quality Metric 5 Indicator	LEEP utilization, trigger
8 – Determine quality metrics performance	Quality Metric 6 Indicator	LEEP utilization, episode

Design dimension	Output field name	Report template name
8 – Determine quality metrics performance	Quality Metric 7 Indicator	Difference in Average MED/day
8 – Determine quality metrics performance	Quality Metric 8 Indicator	Average MED/day during the pre-trigger opioid window
8 – Determine quality metrics performance	Quality Metric 9 Indicator	Average MED/day during the post-trigger opioid window
8 – Determine quality metrics performance	Quality Metric 10 Indicator	Opioid and benzodiazepine prescriptions

3.4.2 PAP output table

The PAP output table contains information about each PAP and their episodes. The table below lists the required output fields.

Table – PAP Output Table

Design dimension	Output field name	Report Template Name
	PAP identification	
2 – Attribute episodes to providers	PAP ID	Provider Code
2 – Attribute episodes to providers	PAP Name	
2 – Attribute episodes to providers	National Provider Identifier	National Provider Identifier

Design dimension	Output field name	Report Template Name
2 - Attribute episodes to providers	Specialty	
2 - Attribute episodes to providers	Provider Billing ZIP Code	
	PAP spend	
5 - Calculate non-risk-adjusted spend	Average Non-risk-adjusted PAP Spend	Average episode cost (non-adjusted)
5 - Calculate non-risk-adjusted spend	By Inpatient facility	Inpatient facility
5 - Calculate non-risk-adjusted spend	By Emergency department or observation	Emergency department or observation
5 - Calculate non-risk-adjusted spend	By Outpatient facility	Outpatient facility
5 - Calculate non-risk-adjusted spend	By Inpatient professional	Inpatient professional
5 - Calculate non-risk-adjusted spend	By Outpatient laboratory	Outpatient laboratory
5 - Calculate non-risk-adjusted spend	By Outpatient radiology	Outpatient radiology
5 - Calculate non-risk-adjusted spend	By Outpatient professional	Outpatient professional
5 - Calculate non-risk-adjusted spend	By Other	Other

Design dimension	Output field name	Report Template Name
5 – Calculate non-risk-adjusted spend	By Pharmacy	Pharmacy
5 – Calculate non-risk-adjusted spend	By Pre-trigger window	
5 – Calculate non-risk-adjusted spend	By Trigger window	
5 – Calculate non-risk-adjusted spend	By Post-trigger window	
5 – Calculate non-risk-adjusted spend	Total Non-risk-adjusted PAP Spend	Total cost across episodes
	Risk adjustment	
7 – Perform risk adjustment	Average Risk-adjusted PAP Spend	Average episode cost (risk-adjusted)
7 – Perform risk adjustment	By Inpatient facility	Inpatient facility
7 – Perform risk adjustment	By Emergency department or observation	Emergency department or observation
7 – Perform risk adjustment	By Outpatient facility	Outpatient facility
7 – Perform risk adjustment	By Inpatient professional	Inpatient professional
7 – Perform risk adjustment	By Outpatient laboratory	Outpatient laboratory
7 – Perform risk adjustment	By Outpatient radiology	Outpatient radiology

Design dimension	Output field name	Report Template Name
7 – Perform risk adjustment	By Outpatient professional	Outpatient professional
7 – Perform risk adjustment	By Other	Other
7 – Perform risk adjustment	By Pharmacy	Pharmacy
7 – Perform risk adjustment	Total Risk-adjusted PAP Spend	N/A
	Quality metrics performance	
8 – Determine quality metrics performance	PAP Quality Metric 1	LEEP utilization under 26 years old with no evidence of high grade dysplasia
8 – Determine quality metrics performance	PAP Quality Metric 2	LEEP utilization with low-grade dysplasia
8 – Determine quality metrics performance	PAP Quality Metric 3	Cervical cancer screening
8 – Determine quality metrics performance	PAP Quality Metric 4	Diagnostic colposcopy
8 – Determine quality metrics performance	PAP Quality Metric 5	LEEP utilization, trigger
8 – Determine quality metrics performance	PAP Quality Metric 6	LEEP utilization, episode
8 – Determine quality metrics performance	PAP Quality Metric 7	Difference in Average MED/day

Design dimension	Output field name	Report Template Name
8 – Determine quality metrics performance	PAP Quality Metric 8	Average MED/day during the pre-trigger opioid window
8 – Determine quality metrics performance	PAP Quality Metric 9	Average MED/day during the post-trigger opioid window
8 – Determine quality metrics performance	PAP Quality Metric 10	Opioid and benzodiazepine prescriptions
	PAP performance	
8 – Determine quality metrics performance	Gain Sharing Quality Metric Pass	N/A
9 – Calculate gain/risk sharing amounts	Gain/Risk Sharing Amount	Total gain / risk share
9 – Calculate gain/risk sharing amounts	PAP Sharing Level	Share factor
	Episode counts	
9 – Calculate gain/risk sharing amounts	Count Of Total Episodes Per PAP	Total episodes
9 – Calculate gain/risk sharing amounts	Count Of Valid Episodes Per PAP	Total episodes included
9 – Calculate gain/risk sharing amounts	Same breakdown as for Average Non-risk-adjusted PAP Spend	

4 Episode agnostic algorithm logic

The algorithm logic forms the basis to code an episode algorithm. Section 4 contains general elements of the episode algorithm that must be used in conjunction with section 5, as section 5 contains the specific details for the episode. Sections 4 and 5 used in conjunction explain the intent of the episode design at a level of granularity that will allow an IT implementation team to create an algorithm that matches the episode design.

4.1 IDENTIFY EPISODE TRIGGERS

The first design dimension of building an episode is to identify triggers.

Episode output fields created: *Facility Trigger Claim ID, Facility Trigger Claim Type, Professional Trigger Claim ID, Member ID, Member Age, Member Name, Associated Facility Claim ID, Associated Facility Claim Type*

The episode may be triggered by a professional claim and an associated facility claim, a facility claim alone, or through custom logic. The triggering logic to be used for this episode will be laid out in section 5.1. The first step in identifying episode triggers is to identify potential triggers, then identifying which of the potential triggers become episode triggers based on clean period logic, and lastly to set the output fields.

4.1.1 Identify potential triggers

■ For episodes triggered by a professional claim and an associated facility claim:

A potential trigger is defined as a professional trigger claim and an associated facility (inpatient and/or outpatient dependent on the episode) claim for the same patient as identified by the same *Member ID*. Professional, inpatient, and outpatient claims are identified based on the input field *Claim Type* as defined in section 6.

The professional trigger claim for the potential trigger must have all of the following conditions:

- The claim has a procedure code for an episode-specific procedure in the input field *Detail Procedure Code* on one or more of its claim detail lines. The configuration file lists the episode-specific procedure codes under “Trigger Procedure”.

- At least one of the claim detail lines with an episode-specific procedure code does not contain a modifier for assistant surgeon, nurse, or discontinued procedure in one of the input fields *All Modifiers*. The configuration file lists the modifiers under “Assistant Surgeon”, “Nurse”, and “Discontinued”.

An associated inpatient claim must meet all of the following conditions:

- The claim has a *Header From Date Of Service* on or before the *Detail From Date Of Service* of the professional trigger claim detail line. It also has a *Header To Date Of Service* on or after the *Detail From Date of Service* of the professional trigger claim detail line.
- The claim has a confirmatory episode-specific diagnosis in the input field *Header Diagnosis Code*. The configuration file lists these diagnosis codes under “Associated Facility”.

An associated outpatient claim must meet all of the following conditions:

- The claim’s *Header From Date of Service* is within two days (i.e., as early as two days before or as late as two days after, inclusive) of the *Detail From Date of Service* of the professional trigger claim detail line.
- The claim has a confirmatory episode-specific diagnosis in the input field *Header Diagnosis Code*. The configuration file lists these diagnosis codes under “Associated Facility”.

To address cases where a professional trigger claim detail line is associated with two or more inpatient or outpatient claims, the following hierarchy is used such that each professional trigger claim detail line is unambiguously associated with one inpatient or outpatient claim. Only the inpatient or outpatient claim that has the highest priority is associated with the potential trigger. The inpatient or outpatient claims that are lower in the hierarchy are treated like any other claims during a potential trigger, not like an associated inpatient or outpatient claim.

- An associated inpatient claim and one of the episode-specific ICD-10 procedure codes that are listed in the configuration file under “Trigger Procedure” in the input field *Header Surgical Procedure Code* has highest priority.
- An associated inpatient claim without an episode-specific procedure code has second priority.

- An associated outpatient claim and one of the episode-specific CPT procedure codes that are listed in the configuration file under “Trigger Procedure” in the input field *Detail Procedure Code* of one of its claim detail lines has third priority.
- An associated outpatient claim without an episode-specific procedure code has fourth priority.

Throughout the hierarchy the following rules apply:

- At each step of the hierarchy, if two or more associated inpatient claims meet the required criteria, the inpatient claim with the earliest *Header From Date Of Service* is chosen. If two or more associated inpatient claims meet the required criteria and have the same *Header From Date Of Service*, the inpatient claim belonging to the hospitalization with the latest *Header To Date Of Service* is chosen. If the *Header To Date Of Service* is the same, the inpatient claim with the lower *Internal Control Number* is chosen.
- At each step of the hierarchy, if two or more associated outpatient claims meet the required criteria, the outpatient claim with the earliest minimum *Header From Date Of Service* is chosen. If two or more associated outpatient claims meet the required criteria and have the same minimum *Header From Date Of Service*, the claim with the greater duration is chosen. See section 6 for the definition of duration. If the duration is the same, the outpatient claim with the lower *Internal Control Number* is chosen.

The start date of a potential trigger is the earlier of the *Detail From Date Of Service* of the professional trigger claim detail line or the *Header From Date Of Service/Detail From Date Of Service* of the associated inpatient/outpatient claim. If the professional trigger claim detail line is associated with an inpatient claim, use the *Header From Date of Service*. If the professional trigger claim detail line is associated with an outpatient claim, use the *Detail From Date of Service*. The end date of a potential trigger is the later of the *Detail To Date Of Service* of the professional trigger claim detail line or the *Header To Date Of Service/Detail To Date of Service* of the associated inpatient/outpatient claim. If the professional trigger claim detail line is associated with an inpatient claim, use the *Header To Date of Service*. If the professional trigger claim detail line is associated with an outpatient claim, use the *Detail To Date of Service*.

A specific rule applies for potential triggers where the associated inpatient claim is part of a hospitalization consisting of two or more inpatient claims. See section 6 for the definition of hospitalization. If an associated inpatient claim is part of a

hospitalization consisting of two or more inpatient claims, the potential trigger starts on the earlier of the *Detail From Date Of Service* of the professional trigger claim detail line or the *Header From Date Of Service* of the hospitalization that the associated inpatient claim is a part of. The potential trigger ends on the later of the *Detail To Date Of Service* of the professional trigger claim detail line or the *Header To Date Of Service* of the hospitalization of which the associated inpatient claim is a part.

■ **For episodes triggered by a facility claim:**

A potential trigger is defined as a facility trigger claim. A facility trigger claim can be either an inpatient claim or an outpatient claim that meets the conditions below. Inpatient and outpatient claims are identified based on the input field *Claim Type* as defined in section 6.

The facility trigger claim must meet one of the following conditions:

- The claim has, in the primary diagnosis field, an episode-specific trigger diagnosis code in the input field *Header Diagnosis Code* and does not have transfer discharge status in the input field *Patient Discharge Status*. The configuration file lists the episode-specific trigger diagnosis codes under “Trigger Diagnosis” and the transfer discharge status codes under “Hospitalization – Transfer”.
- The claim has an episode-specific contingent trigger diagnosis code in the primary diagnosis field, as well as an episode-specific trigger diagnosis code in any of the secondary diagnosis fields and does not have transfer discharge status in the input field *Patient Discharge Status*. The configuration file lists the contingent trigger diagnosis codes under “Contingent Trigger Diagnosis”, the trigger diagnosis codes under “Trigger Diagnosis”, and the transfer discharge status codes under “Hospitalization – Transfer”.

In addition, an outpatient claim must also meet the following condition to be a facility trigger claim:

- The claim has an episode-specific trigger revenue code in the input field *Revenue Code*. The configuration file lists the trigger revenue codes under “Trigger Revenue”.

The start date of a potential trigger is the *Header From Date Of Service* of the facility trigger claim (if the trigger claim is an inpatient claim) or the earliest *Detail From Date Of Service* of the facility trigger detail lines (if the trigger claim is an outpatient claim). The end date of a potential trigger is the *Header To Date Of Service* of the facility

trigger claim (if the trigger claim is an inpatient claim) or the latest *Detail To Date Of Service* of the facility trigger detail lines (if the trigger claim is an outpatient claim).

A specific rule applies for potential triggers where the inpatient claim is part of a hospitalization consisting of two or more inpatient claims. See section 6 for the definition of hospitalization. If an inpatient claim is part of a hospitalization consisting of two or more inpatient claims, the potential trigger starts on the *Header From Date Of Service* of the hospitalization of which the trigger inpatient claim is a part. The potential trigger ends on the *Header To Date Of Service* of the hospitalization of which the inpatient trigger claim is a part.

4.1.2 Identify episode triggers based on clean period

For a potential trigger (potential professional trigger claim or potential facility trigger claim) to become an episode trigger, its start date cannot fall into the clean period of another potential trigger for the same patient. A chronological approach is taken, and the first potential trigger of a given patient is identified as the earliest (i.e., the furthest in the past) episode trigger. The clean period starts the day after the potential trigger end date and extends for the entirety of the post-trigger window plus the number of days equal to the maximum time window allowed for the pre-trigger window (i.e., if fixed, the fixed length, if flexible, the maximum possible number of days). For example:

- If an episode has a flexible pre-trigger window that may be as long as 90 days, and a post-trigger window of 30 days, the clean period for this episode will be 120 days.
- However, if an episode has a fixed pre-trigger window of 30 days, and a post-trigger window of 30 days, the clean period for this episode will be 60 days.

The chronological process continues, and the next potential trigger for that patient that falls after the clean period (i.e., the furthest in the past but after the clean period) constitutes the second trigger.

This process of setting episode windows continues for each patient until the last episode window that ends during the input data date range is defined. The lengths of the pre-trigger and post-trigger windows are listed as parameters in the configuration file under "03 – Determine The Episode Duration".

If two or more potential triggers of the same patient overlap, i.e., the start date of one potential trigger falls between the start date and the end date (inclusive) of one or more other potential triggers of the same patient, then only one of the overlapping potential

triggers is chosen as an episode trigger. The following hierarchy is applied to identify the one potential trigger out of two or more overlapping potential triggers that is assigned as episode trigger:

■ **For episodes triggered by a professional claim and an associated facility claim:**

- The potential trigger with the earliest start date has highest priority.
- If there is a tie, the potential trigger with the latest end date is selected.
- If there is still a tie, the potential trigger with the earliest *Detail From Date Of Service* for the professional trigger claim detail line with the episode-specific procedure is selected.
- If there is still a tie, the potential trigger with the lowest *Internal Control Number* on the professional trigger claim with the episode-specific procedure is selected.

■ **For episodes triggered by a facility claim:**

- A potential trigger with an inpatient facility trigger claim has highest priority and takes precedence over an outpatient facility trigger claim.
- If two or more potential triggers with inpatient facility trigger claims overlap, the potential trigger with the earliest start date has highest priority. If there is a tie, the potential trigger with the latest end date is selected. If there is still a tie, the potential trigger with the lowest *Internal Control Number* on the inpatient trigger claim is chosen.
- If two or more potential triggers with outpatient facility trigger claims overlap, the potential trigger with the earliest start date has highest priority. If there is a tie, the potential trigger with the latest end date is selected. If there is still a tie, the potential trigger with the lowest *Internal Control Number* on the outpatient trigger claim is chosen.

Apply clean period logic after the associated facility is assigned but before any episode-specific logic regarding the associated facility. For example, for the percutaneous coronary intervention (PCI) episodes, apply clean period logic before identifying an episode as acute or non-acute. This means that acute and non-acute potential triggers can disqualify each other as part of the clean period logic. See section 2.3.1 for guidance on the clean period.

4.1.3 Setting output fields

■ **For episodes triggered by a professional claim and an associated facility claim:**

The output field *Professional Trigger Claim ID* is set to the input field *Internal Control Number* of the professional claim that identifies the episode trigger. The output field *Associated Facility Claim ID* is the input field *Internal Control Number* of the associated facility claim that identifies the episode trigger. The output field *Associated Facility Claim Type* is the input field *Claim Type*, as defined in section 6, of that associated facility claim.

- **For episodes triggered by a facility claim:**

The output field *Facility Trigger Claim ID* is set to the input field *Internal Control Number* of the episode trigger. The output field *Facility Trigger Claim Type* is the input field *Claim Type*, as defined in section 6, of the episode trigger.

For both episodes triggered by either a professional claim and an associated facility claim or a facility claim, the output field *Member ID* is set to the input field *Member ID* of the episode trigger. The output field *Member Name* is set to the input field *Member Name* from the Member Extract. The output field *Member Age* is set using the definition for Member Age provided in section 6.

Not all output fields are created for all episodes, e.g., the output field *Associated Facility Claim* is not set for episodes triggered by a facility claim.

4.2 ATTRIBUTE EPISODES TO PROVIDERS

The second design dimension in building an episode is to attribute each episode to a Principal Accountable Provider (also referred to as PAP or Quarterback).

Episode output field created: *PAP ID, PAP Name, Rendering Provider ID, Rendering Provider Name*

PAP output fields created: *PAP ID, PAP Name*

- **For episodes attributed to providers based on the triggering claim:**

The PAP may be a clinician or a facility:

- **Clinician PAP:** If the PAP is the clinician who performed the procedure or made the triggering diagnosis, the output field *PAP ID* is set using the input field *Contracting Entity* of the Provider Extract associated to the *Billing Provider ID* on the *Trigger Professional Claim ID*.

- **Facility PAP:** If the PAP is the facility where the procedure was performed or where the triggering diagnosis was made, the output field *PAP ID* is set using the input field *Contracting Entity* of the Provider Extract associated to the *Billing Provider ID* on the *Trigger Facility Claim ID*.

The output field *Rendering Provider ID* is set differently depending on whether there is a clinician or facility PAP. If the PAP is a facility, it also differs based on being outpatient or inpatient.

- **Clinician PAP:** If the PAP is a clinician, the output field *Rendering Provider ID* is set using the input field *Detail Rendering Provider ID* of the professional trigger claim detail line that is used to set the *Trigger Professional Claim ID*. The output field *Rendering Provider Name* is added from the Provider Extract using the input field *Provider Name*. The output field *PAP Name* is added from the Provider Extract using the input field *Contracting Entity Name*.
- **Outpatient Facility PAP:** If the PAP is an outpatient facility, the output field *Rendering Provider ID* is set using the input field *Detail Rendering Provider ID* of the facility trigger claim that is used to set the *Trigger Facility Claim ID*. The output field *Rendering Provider Name* is added from the Provider Extract using the input field *Provider Name*. The output field *PAP Name* is added from the Provider Extract using the input field *Contracting Entity Name*.
- **Inpatient Facility PAP:** If the PAP is an inpatient facility, the output field *Rendering Provider ID* is set using the input field *Attending Provider NPI* of the facility trigger claim that is used to set the *Trigger Facility Claim ID*. The output field *Rendering Provider Name* is added from the Provider Extract using the input field *Provider Name*. The output field *PAP Name* is added from the Provider Extract using the input field *Contracting Entity Name*.

■ **For episodes attributed based on plurality of visits:**

The PAP may be a clinician or a facility with the highest number of visits included in episode spend. The definition of visit is provided in section 6:

- **Clinician PAP:** If the PAP is the clinician with the highest number of visits, the output field *PAP ID* is set using the input field *Contracting Entity* of the Provider Extract associated to the *Billing Provider ID* with the highest number of visits included in the episode spend.

- **Facility PAP:** If the PAP is the facility with the highest number of visits, the output field *PAP ID* is set using the input field *Contracting Entity* of the Provider Extract associated to the *Billing Provider ID* with the highest number of visits included in the episode spend.

The output field *Rendering Provider ID* is set differently depending on whether there is a clinician or facility PAP. If the PAP is a facility, it also differs based on being outpatient or inpatient.

- **Clinician PAP:** If the PAP is a clinician, the output field *Rendering Provider ID* is set using the input field *Detail Rendering Provider ID* with the highest number of visits included in episode spend. The output field *Rendering Provider Name* is added from the Provider Extract using the input field *Provider Name*. The output field *PAP Name* is added from the Provider Extract using the input field *Contracting Entity Name*.
- **Outpatient Facility PAP:** If the PAP is an outpatient facility, the output field *Rendering Provider ID* is set using the input field *Detail Rendering Provider ID* with the highest number of visits included in episode spend. The output field *Rendering Provider Name* is added from the Provider Extract using the input field *Provider Name*. The output field *PAP Name* is added from the Provider Extract using the input field *Contracting Entity Name*.
- **Inpatient Facility PAP:** If the PAP is an inpatient facility, the output field *Rendering Provider ID* is set using the input field *Attending Provider NPI* with the highest number of visits included in episode spend. The output field *Rendering Provider Name* is added from the Provider Extract using the input field *Provider Name*. The output field *PAP Name* is added from the Provider Extract using the input field *Contracting Entity Name*.

If two or more contracting entities are tied based on the number of visits, the following hierarchy is applied:

- Among contracting entities that are tied, the *Contracting Entity* with the highest amount of spend across included claims is the PAP.
- Among contracting entities that are still tied, the *Contracting Entity* with the visit that starts closest to the *Episode End Date* is the PAP. The visit must be included in episode spend.
- Among contracting entities that are still tied, the PAP is the provider with the lowest *Contracting Entity*.

4.3 DETERMINE THE EPISODE DURATION

The third design dimension of building an episode is to define the duration of the episode.

Episode output fields created: *Pre-Trigger Window Start Date, Pre-Trigger Window End Date, Trigger Window Start Date, Trigger Window End Date, Post-Trigger Window Start Date, Post-Trigger Window End Date, Episode Start Date, Episode End Date*

The following time windows are of relevance in determining the episode duration:

- **Pre-trigger window:** As specified in section 5.3, the pre-trigger window may be flexible or fixed:
 - **Flexible pre-trigger window:** For episodes with a flexible pre-trigger window, the duration of the pre-trigger window is dependent on when the patient had his/her first interaction with the PAP within a specified number of days (x days) prior to the trigger.
 - If there are no professional claims with a *Header From Date of Service* between the xth day prior (inclusive) and one (1) day before the *Trigger Window Start Date*, where the input field *Contracting Entity* of the associated *Billing Provider ID* on the claim is the same as the episode output field *PAP ID*, then the *Pre-Trigger Window Start Date* is left blank and the *Pre-Trigger Window End Date* is left blank, hence there is no pre-trigger window. See sections 4.2 and 5.2 for determining the output field *PAP ID*.
 - If there is only one professional claim with a *Header From Date of Service* between the xth day prior (inclusive) and one (1) day before the *Trigger Window Start Date*, where the input field *Contracting Entity* associated to the *Billing Provider ID* on the claim is the same as the episode output field *PAP ID*, then the *Pre-Trigger Window Start Date* is set to the *Header From Date of Service* of that claim.
 - If there are two or more professional claims with a *Header From Date of Service* between the xth day prior (inclusive) and one (1) day before the *Trigger Window Start Date*, where the input field *Contracting Entity* associated to the *Billing Provider ID* on the claim is the same as the episode output field *PAP ID*, then the *Pre-Trigger Window Start Date* is set to the earliest *Header From Date of Service* of those claims.

The maximum length of the flexible pre-trigger window (x days) is given as a parameter in the configuration file under “03 – Determine The Episode Duration”

– **Fixed pre-trigger window:** For episodes with a fixed pre-trigger window, the duration of the pre-trigger window is fixed at a specified number of days prior (inclusive) to one (1) day before the *Trigger Window Start Date*. The specific number of days is given as a parameter in the configuration file under “03 – Determine The Episode Duration”. The output field *Pre-Trigger Window End Date* is set to one (1) day before the *Trigger Window Start Date*. The *Pre-Trigger Window Start Date* is also the *Episode Start Date*.

- **Trigger window:** The output fields *Trigger Window Start Date* and *Trigger Window End Date* are set using the episode trigger start and end dates, which are defined in section 4.1.
- **Post-trigger window:** The output field *Post-Trigger Window Start Date* is set to the day after the *Trigger Window End Date*. The output field *Post-trigger Window End Date* is set to the xth day after the *Trigger Window End Date* (for a post-trigger window of x days duration). The value for the post-trigger window duration (x days) is provided as a parameter in the configuration file under “03 – Determine The Episode Duration”. The duration for the post-trigger window is provided relative to the *Trigger Window End Date*. The *Post-trigger Window End Date* is also the *Episode End Date*.

If a hospitalization is ongoing on the xth day of the post-trigger window, the *Post-Trigger Window End Date* is set to the *Header End Date* of the hospitalization. A hospitalization is ongoing on the xth day of the post-trigger window if the hospitalization has a *Header Start Date* during the first x days of the post-trigger window and a *Header End Date* beyond the first x days of the post-trigger window. If more than one hospitalization is ongoing on the xth day of the post-trigger window, the latest *Header End Date* present on one of the hospitalizations sets the *Post-trigger Window End Date*. The extension of the post-trigger window due to a hospitalization may not lead to further extensions, i.e., if the post-trigger window is set based on the *Header To Date Of Service* of a hospitalization and a different hospitalization starts during the extension of the post-trigger window and ends beyond it, the episode is not extended a second time. See section 6 for the definition of hospitalization.

The combined duration of the pre-trigger window, trigger window, and post-trigger window is the episode window. All time windows are inclusive of their first and last date. See section 6 for the definition of duration.

To determine which claims and claim detail lines occur during an episode the following assignment rules are used. In addition, specific rules apply to assign claims and claim detail lines to windows during the episode (the pre-trigger window, trigger window, post-trigger window, and hospitalizations):

■ **Assignment to a window before the episode:**

- Hospitalizations, all inpatient claims within them, and all claim detail lines of the inpatient claims are assigned to a window before the episode (e.g., 365 days to one day before the *Episode Start Date*, 90 days to one day before the *Episode Start Date*) if the *Header From Date Of Service* of the hospitalization occurs during the specified time window before the *Episode Start Date*.
- Pharmacy claims and all their claim detail lines are assigned to a window before the episode if the *Header From Date Of Service* occurs during the specified time window before the *Episode Start Date*.
- For the purpose of counting unique claims, outpatient and professional claims are assigned to the window before the episode if all their claim detail lines are assigned to the window before the episode. For the purpose of calculating spend, outpatient and professional claim detail lines are assigned to the window before the episode if the *Detail From Date Of Service* occurs during the specified time window before the *Episode Start Date*.

■ **Assignment to the episode window:**

- Hospitalizations and all inpatient claims within them are assigned to the episode window if the *Header From Date Of Service* occurs during the episode window.
- Pharmacy claims are assigned to the episode window if both the *Header From Date Of Service* and the *Header To Date Of Service* occur during the episode window.
- For the purpose of counting unique claims, outpatient, professional, and long-term care claims are assigned to the episode window if at least one of their claim detail lines is assigned to the episode window. For the purpose of calculating spend, outpatient, professional, and long-term care claim detail lines are assigned to the episode window if both the *Detail From Date Of Service* and the *Detail To Date Of Service* occur during the episode window.

■ **Assignment to the pre-trigger window:**

- Hospitalizations and all inpatient claims within them are assigned to the pre-trigger window if the hospitalization is assigned to the episode window and also has a *Header From Date Of Service* during the pre-trigger window.
- Pharmacy claims are assigned to the pre-trigger window if they are assigned to the episode window and also have a *Header From Date Of Service* during the pre-trigger window.
- For the purpose of counting unique claims, outpatient, professional, and long-term care claims are assigned to the pre-trigger window if at least one of their claim detail lines is assigned to the pre-trigger window. For the purpose of calculating spend, outpatient, professional, and long-term claim detail lines are assigned to the pre-trigger window if they are assigned to the episode window and also have a *Detail From Date Of Service* during the pre-trigger window.

■ **Assignment to the trigger window:**

- Hospitalizations and all inpatient claims within them are assigned to the trigger window if the *Header From Date Of Service* of the hospitalization occurs during the trigger window.
- Pharmacy claims are assigned to the trigger window if both the *Header From Date Of Service* and the *Header To Date Of Service* occur during the trigger window.
- For the purpose of counting unique claims, outpatient and professional, and long-term care claims are assigned to the trigger window if all their claim detail lines are assigned to the trigger window. For the purpose of calculating spend, outpatient, professional, and long-term care claim detail lines are assigned to the trigger window if both the *Detail From Date Of Service* and the *Detail To Date Of Service* occur during the trigger window.

■ **Assignment to the post-trigger window:**

- Hospitalizations and all inpatient claims are assigned to the post-trigger window if the hospitalization is assigned to the episode window and also has a *Header From Date Of Service* during the post-trigger window.
- Pharmacy claims are assigned to the post-trigger window if they are assigned to the episode window and also have a *Header To Date of Service* during the post-trigger window.

- For the purpose of counting unique claims, outpatient, professional, and long-term care claims are assigned to the post-trigger window if at least one of their claim detail lines is assigned to the post-trigger window. For the purpose of calculating spend, outpatient, professional, and long-term care claim detail lines are assigned to the post-trigger window if they are assigned to the episode window and also have a *Detail To Date of Service* during the post-trigger window.

- **Assignment to hospitalizations:**

- Outpatient and professional claims are assigned to a hospitalization if they are not assigned to the trigger window and all their claim detail lines are assigned to the hospitalization. Outpatient and professional claim detail lines are assigned to a hospitalization if the *Detail From Date Of Service* and the *Detail To Date Of Service* occur during the hospitalization.

4.4 IDENTIFY CLAIMS INCLUDED IN EPISODE SPEND

The fourth design dimension of building an episode is to identify which claims and claim detail lines are included in the calculation of episode spend. For short, such claims or claim detail lines are referred to as included claims or included claim detail lines.

Episode output fields created: *Count of Included Claims*

Different rules for the inclusion of claims and claim detail lines apply to claims and claim detail lines assigned to different types of services and windows. The breakdown for how to count included claims and claim detail lines by care category is defined in section 6. How different types of services are defined is detailed below. Which type of services are included in the episode, and in which window, are episode specific and detailed in section 5.4. See section 4.3 for how claim and claim detail lines are assigned to different windows during the episode.

The following rules for types of service apply:

- **Care for specific diagnoses:** Hospitalizations, outpatient, professional, and long-term care claims with ICD-10 diagnosis codes for specific diagnoses in the input field *Header Diagnosis Code*. See the configuration file under “Care For Specific Diagnoses” for the list of codes. The code needs to be in the primary diagnosis code field. A special rule applies whenever a hospitalization is included. All professional and outpatient claims

assigned to an included hospitalization are included. See section 4.3 for how professional and outpatient claims are assigned to hospitalizations.

- **Specific anesthesia:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific anesthesia in the input field *Detail Procedure Code*. See the configuration file under “Anesthesia” for the list of codes.
- **Related evaluation and management visits:** Outpatient and professional claim detail lines with CPT codes for specific E&M visits in the input field *Detail Procedure Code*. See the configuration file under “E&M Visits” for the list of codes. If only office visits with the PAP are included, the input field *Contracting Entity* associated to the *Billing Provider ID* of the claim for the office visit must match the *PAP ID* for the episode. To determine if this is the case see section 5.4. If only office visits with a related diagnosis code are included, there must be an episode-specific related ICD-10 diagnosis code in the primary diagnosis code field. See the configuration file under “Related Diagnoses” for the list of codes. To determine if this is the case see section 5.4.
- **Specific imaging and testing:** Inpatient claims, and outpatient and professional claim detail lines with ICD-10/CPT/HCPCS procedure codes for specific imaging and testing in the input field *Header Surgical Procedure Code* or *Detail Procedure Code*. See the configuration file under “Imaging and Testing” for the list of codes. The ICD-10 procedure codes can be in any field.
- **Specific medications:** Pharmacy claims with HIC3 codes for specific medications. Pharmacy claims with HIC3 codes (Hierarchical Ingredient Code Level 3 identifiers provided by First Databank) for specific medications are identified by the presence of a National Drug Code (NDC) in the input field *National Drug Code*. See the configuration file under “Medications” for the list of codes. To identify specific medications, the HIC3 codes must be cross-walked to NDCs. Since NDCs change over time, an updated crosswalk including current and historical NDCs must be used for each reporting period.
 - **Note:** If a pharmacy claim contains a medication that is a preferred brand or preferred generic as identified on the TennCare Preferred Drug List (PDL), the included spend of that medication for episodes will be set at \$10. This adjustment will be made at the national drug code (NDC) level. If a pharmacy claim contains a medication that is not listed as a preferred brand or preferred generic on the PDL, there will be no adjustment to the included spend of that medication.

- **Specific pathology:** Outpatient and professional claim detail lines with CPT/HCPCS procedure codes for specific pathology in the input field *Detail Procedure Code*. See the configuration file under “Pathology” for the list of codes.
- **Specific surgical and medical procedures:** Inpatient claims, and outpatient and professional claim detail lines with ICD-10/CPT/HCPCS procedure codes for specific procedures in the input field *Header Surgical Procedure Code* or *Detail Procedure Code*. See the configuration file under “Surgical and Medical Procedures” for the list of codes. The ICD-10 procedure codes can be in any field.
- **Specific excluded surgical and medical procedures:** Inpatient claims, and outpatient and professional claim detail lines with ICD-10/CPT/HCPCS procedure codes for specific excluded procedures in the input field *Header Surgical Procedure Code* or *Detail Procedure Code*. See the configuration file under “Excluded Surgical and Medical Procedures” for the list of codes. This exclusion of claims or claim detail lines takes precedence over any other inclusion logic.

The output field *Count of Included Claims* is the total number of claims included in the episode. See section 6 for details on counts of claims by care category.

4.5 CALCULATE NON-RISK-ADJUSTED EPISODE SPEND

The fifth design dimension of building an episode is to calculate the non-risk-adjusted spend for each episode.

Episode output fields created: *Non-risk-adjusted Episode Spend*

PAP output fields created: *Average Non-risk-adjusted PAP Spend, Average Non-risk-adjusted PAP Spend by <Care Category X>, Average Non-risk-adjusted PAP Spend by <Window X>, Total Non-risk-adjusted PAP Spend*

The *Non-risk-adjusted Episode Spend* is defined as the sum of:

- The *Detail Paid Amount* for included claim detail lines for detail-paid claim types (e.g., outpatient and professional). If a claim detail line is included for two or more reasons (e.g., due to an included procedure), its *Detail Paid Amount* counts only once towards the *Non-risk-adjusted Episode Spend*.
- The *Header Paid Amount* for included claims for header-paid claim types (e.g., inpatient and pharmacy).

- The *Patient Cost Share* for included claims.

The output field *Non-risk-adjusted Episode Spend* is calculated overall, by window during the episode, and by reporting care category. See section 6 for the definition of the reporting care categories.

The fields *Average Non-risk-adjusted PAP Spend* and *Total Non-risk-adjusted PAP Spend* are added to the PAP output table. *Average Non-risk-adjusted PAP Spend* is calculated as the average of the *Non-risk-adjusted Episode Spend* across valid episodes for a given *PAP ID*. *Total Non-risk-adjusted PAP Spend* is calculated as the sum of the *Non-risk-adjusted Episode Spend* across valid episodes for a given PAP. The output field *Average Non-risk-adjusted PAP Spend* is calculated overall and by reporting care category. See sections 4.2 and 5.2 for the identification of *PAP IDs* and section 4.6 and 5.6 for the definition of valid episodes. See section 6 for the definition of the reporting care categories.

4.6 IDENTIFY EXCLUDED EPISODES

The sixth design dimension of building an episode is to identify episodes that are excluded from the episode-based payment model.

Episode output fields created: *Any Exclusion, Exclusion Inconsistent Enrollment, Exclusion Third-party Liability, Exclusion Dual Eligibility, Exclusion FQHC/RHC, Exclusion No PAP ID, Exclusion Incomplete Episode, Exclusion Different Care Pathway, Exclusion Age, Exclusion Death, Exclusion Left Against Medical Advice, Exclusion High Outlier*

Each *Exclusion <name of exclusion>* output field indicates whether an episode is excluded for a given reason and therefore invalid for the purpose of the episode-based payment model. If an episode is excluded for more than one reason each exclusion is indicated. The output field *Any Exclusion* indicates whether an episode contains any exclusion. Episodes may be excluded for business reasons, clinical reasons, non-clinical patient-specific reasons, or because they are high outliers.

After all exclusions have been applied, a set of valid episodes remains.

Business exclusions

- **Inconsistent enrollment:** An episode is excluded if the patient was not continuously enrolled in the plan during the episode window. Enrollment is verified using the *Eligibility Start Date* and *Eligibility End Date* from the Member Extract.

A patient is considered continuously enrolled if the patient's *Eligibility Start Date* for the plan falls before or on (\leq) the *Episode Start Date* and the *Eligibility End Date* for the plan falls on or after (\geq) the *Episode End Date*. The output field *Member ID* of the episode table is linked to the input field *Member ID* of the Member Extract to identify the enrollment information for each patient.

A patient may have multiple entries for *Eligibility Start Date* and *Eligibility End Date* for full enrollment in the plan and some of the dates may be overlapping. In such cases, continuous, non-overlapping records of a patient's enrollment are created before confirming whether the patient was continuously enrolled during an episode. If a patient has an *Eligibility Start Date* without a corresponding *Eligibility End Date* for the plan, enrollment is considered to be ongoing through the last date of the input data.

If a patient was not continuously enrolled in the plan before or after the episode window, but was continuously enrolled during the episode window, the episode is not excluded.

- **Third-party liability:** An episode is excluded if an inpatient, outpatient, professional, pharmacy, or long-term care claim that is assigned to the episode window is associated with a third-party liability amount. A claim is considered to be associated with a third-party liability amount if either the input field *Header TPL Amount* or any of the input fields *Detail TPL Amount* have a value greater than ($>$) zero. The claim with a positive TPL amount may or may not be included in the calculation of episode spend. If a patient has a claim associated with a third-party liability amount before or after the episode window, but not during the episode window, the episode is not excluded.
- **Dual eligibility:** An episode is excluded if the patient had dual coverage by Medicare and Medicaid during the episode window. See the configuration file under "Business – Dual Eligibility".

If a patient had dual coverage before or after the episode window, but not during the episode window, the episode is not excluded.

- **Federally Qualified Health Center/Rural Health Clinic:**
 - **Exclude FQHCs and RHCs:** Episodes for which the quarterback is an FQHC or RHC are excluded. If the quarterback is included in the list of known FQHCs and RHCs, either freestanding or part of a larger group or health system, their episodes will be excluded.
- **No PAP ID:** An episode is excluded if the *PAP ID* cannot be identified.

- **Incomplete episodes:** An episode is excluded if either:
 - The triggering professional claim detail lines included in episode spend are less than or equal to 0, OR
 - It is within the bottom 2.5% of all episodes with the lowest *Non-risk-adjusted Episode Spend* (not the *Risk-adjusted Episode Spend*), without taking into account episodes where the triggering professional claim spend is less than or equal to (\leq) 0.
- **Overlapping episodes:** Two valid episodes are considered overlapping if the following four conditions are satisfied:
 - The included spend of one valid episode shares at least one claim detail line with the included spend of another valid episode, AND
 - Both episodes have the same Tax Identification Number in the field *Billing Provider ID* assigned to the quarterback, AND
 - Both episodes have the same *Member ID* for the patient, AND
 - Both episodes are listed in **Table – Episode Hierarchy by Exclusion Condition**

This exclusion is applied after business, clinical, patient and high-cost outlier exclusions have been applied.

If there is an overlap between two episodes, priority is assigned to the higher-ranking episode. Rank is provided in **Table – Episode Hierarchy by Exclusion Condition** where 1 is the highest rank. Episode with the lower rank is excluded; episode with the higher rank is not excluded.

If there is an overlap between three or more episodes, priority is assigned to the highest-ranking episode. All other episodes that are lower in the hierarchy will be excluded.

Table – Episode Hierarchy by Exclusion Condition

Episodes in 2019 Performance period	Rank
Perinatal	1
HIV	2
Valve Repair and Replacement	3

Episodes in 2019 Performance period	Rank
Coronary Artery Bypass Graft (CABG)	4
Spinal Fusion	5
Total Joint Replacement (Hip & Knee)	6
Femur/pelvic fracture	7
Non-acute Percutaneous Coronary Intervention (PCI)	8
Acute Percutaneous Coronary Intervention (PCI)	9
Bariatric surgery	10
Spinal decompression (without spinal fusion)	11
Hysterectomy	12
Outpatient and Non-Acute Inpatient Cholecystectomy	13
Appendectomy	14
Hernia Repair	15
Knee Arthroscopy	16
Tonsillectomy	17
Breast biopsy	18
Screening and Surveillance Colonoscopy	19
Upper GI Endoscopy (Esophagogastroduodenoscopy (EGD))	20
Colposcopy	21
Oppositional Defiant Disorder (ODD)	22
Attention Deficit and Hyperactivity Disorder (ADHD)	23
Gastrointestinal (GI) Obstruction	24
Pancreatitis	25
Congestive Heart Failure (CHF) Acute Exacerbation	26
Diabetes Acute Exacerbation	27
Urinary Tract Infection (UTI) – Inpatient	28
Gastrointestinal Hemorrhage (GIH)	29

Episodes in 2019 Performance period	Rank
Chronic Obstructive Pulmonary Disease (COPD) Acute Exacerbation	30
Acute Seizure	31
Pneumonia (PNA)	32
Bronchiolitis	33
Pediatric Pneumonia	34
Asthma Acute Exacerbation	35
Back / Neck pain	36
Syncope	37
Shoulder non-operative injuries	38
Knee non-operative injuries	39
Ankle non-operative injuries	40
Wrist non-operative injuries	41
Skin and Soft Tissue Infection	42
Otitis media	43
Urinary Tract Infection (UTI) – Outpatient	44
Respiratory infection	45

Clinical exclusions

- **Different care pathway:** An episode is excluded if the patient has a medical code that indicates a different care pathway during a specified time window on any inpatient, outpatient, or professional claim in the input field *Header Diagnosis Code* (any field), *Header Surgical Procedure Code*, or *Detail Procedure Code*. The detailed list of codes and time windows is given in the configuration file under “Clinical – (condition for exclusion)”.

The claims and claim detail lines that are searched for different care pathways do not have to be included claims or included claim detail lines. In addition, if a patient lacked continuous eligibility during the year before the episode or during the episode window, codes for different care pathways are checked in the data available.

Patient exclusions

- **Age:** An episode is excluded if the member age does not fall into the valid age range or if it is invalid. The valid age range is listed as parameters in the configuration file under "06 – Identify Excluded Episodes". See section 6 for how member age is defined.
- **Death:** An episode is excluded if the patient has a *Patient Discharge Status* of "Expired" on any inpatient or outpatient claim assigned to the episode window. The claim may be an included claim or not. The values of the *Patient Discharge Status* used to identify whether the patient expired are listed in the configuration file under "Patient – Death".
- **Left against medical advice:** An episode is excluded if the patient has a *Patient Discharge Status* of "Left Against Medical Advice or Discontinued Care" on any inpatient or outpatient claim during the episode window. The claim may be an included claim or not. The value of the *Patient Discharge Status* used to identify whether the patient left against medical advice is listed in the configuration file under "Patient – LAMA".

High-cost outliers

An episode is excluded if the *Risk-adjusted Episode Spend* (not the *Non-risk-adjusted Episode Spend*) is 3 standard deviations above (>) the mean *Risk-adjusted Episode Spend* of all episodes not otherwise excluded. This threshold will be finalized at the same time as the gain and risk sharing thresholds. Because this exclusion uses the risk-adjusted episode spend, it is the only exclusion that takes place after the risk adjustment process.

A hierarchy is used to present the exclusions in the provider report. See section 6 for the hierarchy of exclusions.

4.7 PERFORM RISK ADJUSTMENT

The seventh design dimension of building an episode is to risk-adjust the *Non-risk-adjusted Episode Spend* for risk factors that may contribute to higher episode spend given the characteristics of a patient and are outside of the PAP's control.

Episode output fields created: *Risk Factor (risk factor number), Episode Risk Score, Risk-adjusted Episode Spend*

PAP output fields created: *Average Risk-adjusted PAP Spend, Average Risk-adjusted PAP Spend by <Care Category X>, Total Risk-adjusted PAP Spend*

Risk adjustment first requires identification of the risk factors that affect each episode. Once risk factors have been determined, each payer calculates the *Episode Risk Score* and the *Risk-adjusted Episode Spend*. Each *Risk Factor (risk factor number)* output field indicates whether an episode's spend is risk-adjusted for a given risk factor. The relevant codes are identified only on claims with *Header From Date of Service* (for header-paid claims) or *Detail From Date of Service* (for detail-paid claims) falling during the time period specified for the given risk factor in the configuration file. When a risk factor is based on the presence of a diagnosis, the output field *Risk Factor (risk factor number)* indicates if a claim exists with a diagnosis in any diagnosis field for the referenced risk factor in the input field *Header Diagnosis Code*.

The PAP output field *Average Risk-adjusted PAP Spend* is calculated as the average of the Risk-adjusted Episode Spend across valid episodes for each *PAP ID*. The *Total Risk-adjusted PAP Spend* is calculated as the sum of the *Risk-adjusted Episode Spend* across valid episodes for each *PAP ID*.

For additional details on the risk adjustment process, please refer to the document "Perform risk adjustment for retrospective episode-based payment – guiding principles and proposed methodology".

4.8 DETERMINE QUALITY METRICS PERFORMANCE

The eighth design dimension of building an episode is the calculation of the quality metrics and the identification of *PAP IDs* who pass the quality metrics performance requirement. Quality metrics are calculated by each payer on an aggregated basis across all episodes with the same *PAP ID*. Denied claims should be used in the calculation of quality metrics.

Episode output fields created: *Quality Metric (quality metric number) Indicator, Quality Metric (quality metric number) Denominator*

PAP output fields created: *PAP Quality Metric (quality metric number), Gain Sharing Quality Metric Pass*

The number of *Quality Metric Indicator* episode output fields and *PAP Quality Metric* output fields will match the total number of quality metrics for each episode.

For most quality metrics the following logic applies. If there are any exceptions these will be detailed in section 5.8. The *Quality Metric (n) Indicator* marks episodes that complied with quality metric (n). The *PAP Quality Metric (n)* is expressed as a percentage for each PAP based on the following ratio:

- Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric (n) Indicator*
- Denominator: Number of valid episodes of the *PAP ID*

Section 5.8 will provide detail on what the *Quality Metric (n) Indicators* are for this episode.

There are two types of quality metrics: those tied to gain sharing and those that are informational (i.e., not tied to gain sharing). These may be calculated including valid or total episodes of the *PAP ID*. These details are specified in section 5.8.

The output field *Gain Sharing Quality Metric Pass* is set based on the performance of the *PAP ID* on the quality metrics that are tied to gain sharing. The output field *Gain Sharing Quality Metric Pass* indicates if the percentage of valid episodes of the *PAP ID* that comply with quality metrics tied to gain sharing met the required thresholds for gain sharing. Setting thresholds for the quality metrics is beyond the scope of this DBR, hence thresholds will be set and provided separately.

4.9 CALCULATE GAIN/RISK SHARING AMOUNTS

The ninth and final design dimension of building an episode is to calculate the gain or risk sharing amount for each *PAP ID*. Gain and risk sharing are calculated by each payer on an aggregated basis across all of *PAP ID*'s episodes covered by that payer.

PAP output fields created: *Count Of Total Episodes Per PAP, Count Of Valid Episodes Per PAP, Gain/Risk Sharing Amount, PAP Sharing Level*

Gain and risk sharing amounts are calculated based on the episodes of each *PAP ID* that ended during the reporting period. To calculate the gain or risk sharing amount paid to/by each *PAP ID* the following pieces of information are used:

- Commendable threshold, acceptable threshold, and gain sharing limit threshold. Setting these thresholds is beyond the scope of this DBR.
- Number of episodes of each *PAP ID*: The output field *Count Of Total Episodes Per PAP ID* is defined as the number of total episodes of each *PAP ID* during the reporting period.

The output field *Count Of Valid Episodes Per PAP ID* is defined as the number of valid episodes of each *PAP ID* during the reporting period. *Count Of Valid Episodes Per PAP ID* is calculated overall and by reporting care category. Episodes are counted separately by each payer.

- Performance of each *PAP ID* on quality metrics tied to gain sharing: Only *PAP IDs* that pass the quality metrics tied to gain sharing are eligible for gain sharing. Setting thresholds for the quality metrics is beyond the scope of this DBR. See section 4.8 for the calculation of the output field *Gain Sharing Quality Metric Pass*, which indicates whether a *PAP ID* passes the quality metrics tied to gain sharing.
- Gain share proportion and risk share proportion: The gain share proportion is set at 50% and the risk share proportion is set at 50%.

Gain sharing payment: A PAP identified by *PAP ID* receives a gain sharing payment if two criteria are met: (1) it passes the quality metrics tied to gain sharing, and (2) the *Average Risk-adjusted PAP ID Spend* is below (<) the *Commendable Threshold*. Two cases exist:

- If the *Average Risk-adjusted PAP ID Spend* is below (<) the *Commendable Threshold* and at or above (\geq) the *Gain Sharing Limit Threshold*, the *Gain/Risk Sharing Amount* is:

Gain Sharing Amount =

$((\text{Commendable Threshold} - \text{Average Risk-adjusted PAP ID Spend}) * \text{Count of Valid Episodes Per PAP ID} * 50\%)$

- If the *Average Risk-adjusted PAP ID Spend* is below (<) the *Commendable Threshold* and below (<) the *Gain Sharing Limit Threshold*, the *Gain/Risk Sharing Amount* is:

Gain Sharing Amount =

$((\text{Commendable Threshold} - \text{Gain Sharing Limit Threshold}) * \text{Count of Valid Episodes Per PAP ID} * 50\%)$

Risk sharing payment: A PAP identified by *PAP ID* owes a risk sharing payment if its *Average Risk-adjusted PAP ID Spend* is at or above (\geq) the *Acceptable Threshold*. The risk sharing payment applies irrespective of the performance of the *PAP ID* on the quality metrics. The *Risk Sharing Amount* is calculated as:

Risk Sharing Amount =

*((Average Risk-adjusted PAP ID Spend – Acceptable Threshold) * Count of Valid Episodes Per PAP ID * 50%)*

To summarize the cost performance of each *PAP ID* in the episode-based payment model, the output field *PAP Sharing Level* is set to

- *"1" if Average Risk-adjusted PAP ID Spend < Gain Sharing Limit Threshold*
- *"2" if Average Risk-adjusted PAP ID Spend < Commendable Threshold and also ≥ Gain Sharing Limit Threshold*
- *"3" if Average Risk-adjusted PAP ID Spend < Acceptable Threshold and also ≥ Commendable Threshold*
- *"4" if Average Risk-adjusted PAP ID Spend ≥ Acceptable Threshold*

5 Colposcopy episode detailed description

This section provides episode-specific details for building the colposcopy episode, and must be used in conjunction with section 4, as section 4 contains general elements of the episode algorithm. Sections 4 and 5 used in conjunction explain the intent of the episode design at a level of granularity that will allow an IT implementation team to create an algorithm that matches the episode design.

5.1 IDENTIFY EPISODE TRIGGERS

The colposcopy episode is triggered by a professional claim and an associated facility outpatient claim as described in section 4.1, with the following exceptions to section 4.1.1:

- The colposcopy episode may or may not have an associated facility claim. Episodes with professional claims that do not have an associated facility claim are assumed to have had the triggering procedure taking place in the provider's office if the triggering procedure has in the input field *Place of Service*. The configuration file lists the place of service code for provider's office under "Office". For colposcopy episodes that took place in the provider's office, the output field *Associated Facility Claim ID* is left blank, and the output field *Associated Facility Claim Type* is also left blank.
- The associated facility claim, if it exists, may only be an outpatient claim.

5.2 ATTRIBUTE EPISODES TO PROVIDERS

This episode has a provider PAP based on the triggering claim and follows the process described in section 4.2 for attributing to providers based on the triggering claim.

5.3 DETERMINE THE EPISODE DURATION

For this episode there are two windows:

- **Pre-trigger window:** For this episode, the output field *Pre-trigger Window Start Date* is left blank; and the output field *Pre-trigger Window End Date* is left blank.
- **Trigger window:** Refer to section 4.3 for guidance.
- **Post-trigger window:** Refer to section 4.3 for guidance

5.4 IDENTIFY CLAIMS INCLUDED IN EPISODE SPEND

For this episode, services are included as defined in section 4.4, with the following specifications:

Pre-trigger window

This episode has no pre-trigger window.

Trigger window

For this episode, claims and claim detail lines assigned to the trigger window are included if they are also assigned to one of the following types of services:

- **Care for specific diagnoses:** Refer to section 4.4 for guidance.
- **Specific anesthesia:** Refer to section 4.4 for guidance.
- **Specific imaging and testing:** Refer to section 4.4 for guidance.
- **Specific medications:** Refer to section 4.4 for guidance.
- **Specific pathology:** Refer to section 4.4 for guidance.
- **Specific surgical and medical procedures:** Refer to section 4.4 for guidance.

For this episode, claims and claim detail lines assigned to the trigger window are excluded if they are also assigned to one of the following types of services:

- **Specific excluded surgical and medical procedures:** Refer to section 4.4 for guidance.

Post-trigger window

For this episode, claims and claim detail lines assigned to the post-trigger window are included if they are also assigned to one of the following types of services:

- **Care for specific diagnoses:** Refer to section 4.4 for guidance.
- **Specific anesthesia:** Refer to section 4.4 for guidance.
- **Specific imaging and testing:** Refer to section 4.4 for guidance.
- **Specific medications:** Refer to section 4.4 for guidance.
- **Specific pathology:** Refer to section 4.4 for guidance.
- **Specific surgical and medical procedures:** Refer to section 4.4 for guidance.

For this episode, claims and claim detail lines assigned to the post-trigger window are excluded if they are also assigned to one of the following types of services:

- **Specific excluded surgical and medical procedures:** Refer to section 4.4 for guidance.

5.5 CALCULATE NON-RISK-ADJUSTED SPEND

This episode follows the process described in section 4.5.

5.6 IDENTIFY EXCLUDED EPISODES

This episode follows the process described in section 4.6 with two additional specifications:

Clinical exclusions

- **Hysterectomy:** An episode is excluded if either:
 - There exists a specific CPT code in the input field *Detail Procedure Code* of a professional or outpatient claim detail line, as listed in the configuration file under “Clinical – Hysterectomy”, during the episode window or up to 61 days before the episode. OR,
 - There exists a specific ICD-10 surgical procedure code in the input field *Surgical Procedure Code* on an inpatient claim line for hysterectomy, as listed in the configuration file under “Clinical – Hysterectomy”, during the episode window.
- **Pregnancy:** An episode is excluded if:
 - There exists a pregnancy, which is identified by the presence of a specific ICD-10 diagnosis code in any diagnosis field in the input field *Header Diagnosis Code*, as listed in the configuration file under “Clinical – Pregnancy”, during the episode window or up to 266 days before the episode; AND
 - There does not exist a delivery diagnosis code, which is identified by an ICD-10 diagnosis code in any diagnosis field in the input field *Header Diagnosis Code*, as listed in the configuration file under “Clinical – Delivery”, during the episode window or up to 266 days before the episode; OR
 - There does not exist a delivery procedure code, which is identified by either a professional or an outpatient claim detail line CPT/HCPCS code in the input field

Detail Procedure Code, as listed in the configuration file under “Clinical – Delivery”, during the episode window or up to 266 days before the episode.

5.7 PERFORM RISK ADJUSTMENT

This episode follows the process described in section 4.7 with six additional specification:

- The risk factor “Risk Factor – Age Greater Than or Equal To X Years And Less Than Or Equal To X Years” is identified as a risk factor for an episode if the output field *Member Age* falls into the specified range. The age range is listed as parameters in the configuration file under “07 – Perform Risk Adjustment”. Member age is defined in section 6.
- The risk factor “Excision with CIN 2 ” is identified as a risk factor for an episode if:
 - There exists a professional or outpatient claim with a CPT procedure code for an excision as listed in the configuration file under “Excision” in the input field *Detail Procedure Code* assigned to the episode window. AND,
 - There exists the absence of CIN 3, which is identified by an ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 3”, during the episode window or up to 365 days before the episode window. AND,
 - There exists the presence of CIN 2, which is identified by an ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 2”, during the episode window or up to 365 days before the episode window.
- The risk factor “Excision with CIN 3” is identified as a risk factor for an episode if:
 - There exists a professional or outpatient claim with a CPT procedure code for an excision as listed in the configuration file under “Excision” in the input field *Detail Procedure Code* assigned to the episode window. AND,
 - There exists the presence of CIN 3, which is identified by an ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 3”, during the episode window or up to 365 days before the episode window.
- The risk factor “CIN 1 Alone” is identified as a risk factor for an episode if:

- There exists a specific ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 1”, during the episode window or up to 365 days before the episode window. AND,
 - There exists the absence of CIN 2 or CIN 3, which is identified by an ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 2 or 3”, during the episode window or up to 365 days before the episode window. AND,
 - There exists the absence of a professional or outpatient claim with a CPT procedure code for an excision as listed in the configuration file under “Excision” in the input field *Detail Procedure Code* assigned to the episode window.
- The risk factor “CIN 2 Alone” is identified as a risk factor for an episode if:
 - There exists a specific ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 2”, during the episode window or up to 365 days before the episode window. AND,
 - There exists the absence of CIN 3, which is identified by an ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 3”, during the episode window or up to 365 days before the episode window. AND,
 - There exists the absence of a professional or outpatient claim with a CPT procedure code for an excision as listed in the configuration file under “Excision” in the input field *Detail Procedure Code* assigned to the episode window.
 - The risk factor “CIN 3 Alone” is identified as a risk factor for an episode if:
 - There exists a specific ICD-10 diagnoses code, in any diagnosis field, in the input field *Header Diagnosis Code*, as listed in the configuration under “CIN 3”, during the episode window or up to 365 days before the episode window. AND,
 - There exists the absence of a professional or outpatient claim with a CPT procedure code for an excision as listed in the configuration file under “Excision” in the input field *Detail Procedure Code* assigned to the episode window.

5.8 DETERMINE QUALITY METRICS PERFORMANCE

This episode has two quality metrics that are tied to gain sharing and eight informational (i.e., not tied to gain sharing) quality metrics. An overview of how to determine quality

metric performance is provided in section 4.8. Additionally, the output field *Gain Sharing Quality Metric Pass* is set based on the logic described in section 4.8 with the following additional specifications:

- If a PAP does not have episodes in a relevant performance period that are covered by a quality metric tied to gain sharing, i.e., the value in the episode output field *Quality Metric 1 Denominator* and/or *Quality Metric 2 Denominator* is 0, the value in the PAP output field *Gain Sharing Quality Metric Pass* is determined only by quality metrics tied to gain sharing that do have an episode output field *Quality Metric 1 Denominator* or *Quality Metric 2 Denominator* of greater than 0.
- If there is no quality metric tied to gain sharing that has an episode output field *Quality Metric 1 Denominator* or *Quality Metric 2 Denominator* of greater than 0, the value in the PAP output field *Gain Sharing Quality Metric Pass* is set to pass.

Episode output fields created: *Quality Metric 1 Indicator, Quality Metric 1 Denominator, Quality Metric 2 Indicator, Quality Metric 2 Denominator, Quality Metric 3 Indicator, Quality Metric 4 Indicator, Quality Metric 5 Indicator, Quality Metric 6 Indicator, Quality Metric 7 Indicator, Quality Metric 8 Indicator, Quality Metric 9 Indicator, Quality Metric 10 Indicator*

PAP output fields created: *PAP Quality Metric 1, PAP Quality Metric 2, PAP Quality Metric 3, PAP Quality Metric 4, PAP Quality Metric 5, PAP Quality Metric 6, PAP Quality Metric 7, PAP Quality Metric 8, PAP Quality Metric 9, PAP Quality Metric 10, Gain Sharing Quality Metric Pass*

Due to the complexity of the opioid morphine equivalent dose (MED) quality metrics, we define the following terms in advance so they can be referenced in multiple metrics:

- Opioid Pharmacy Claim: Opioid Pharmacy Claims are identified through *Generic Sequence Numbers* (GSNs) as specified in a separate opioid file. Pharmacy claims with an opioid GSN are identified by the presence of a NDC in the input field *National Drug Code* (NDC). To identify specific medications, the NDCs must be cross-walked to GSNs because NDCs change over time. An updated crosswalk including current and historical NDCs must be used for each reporting period.
- Pre-trigger Opioid Window: The period prior to the *Trigger Window Start Date* for which the average morphine equivalent dose (MED) per day metric is calculated. For the colposcopy episode, the Pre-trigger Opioid Window is the days 1-60 prior to the *Trigger Window Start Date*. Opioid Pharmacy Claims in this time period are identified by having a *Header From Date Of Service* in the Pre-trigger Opioid Window, inclusive of

the first and last days of the Pre-trigger Opioid Window. The duration and timing of the Pre-trigger Opioid Window is specific to a given episode and therefore may not be the same across episodes. Further, the Pre-trigger Opioid window may or may not align with the windows in section 2.3.3.

- **Post-trigger Opioid Window:** The period for which the average MED/day metric is calculated. For the colposcopy episode, the post-trigger Opioid Window is the episode trigger window and days 1-90 after the *Trigger Window End Date*. Opioid Pharmacy Claims in this time period are identified by having a *Header From Date Of Service* in the Post-trigger Opioid Window, inclusive of first and last days of the Post-trigger Opioid Window. The duration and timing of the Post-trigger Opioid Window is specific to a given episode and therefore may not be the same across episodes. Further, the Post-trigger Opioid window may or may not align with the windows in section 2.3.3.

Quality metrics tied to gain sharing:

- **LEEP utilization under 26 years old with no evidence of high grade dysplasia (Quality Metric 1 – lower rate indicative of better performance):**

- *Quality Metric 1 Indicator* marks episodes that satisfy the following conditions:
 - They have a professional or outpatient claim with a CPT code in the input field Detail Procedure Code, as listed in the configuration file under “LEEP/Conization Episode”, assigned to the episode window, AND
 - The output field Member Age has a value less than 26 years old, AND
 - The patient does not have a diagnosis of high grade dysplasia on a professional, outpatient, or inpatient claim assigned to the episode window or up to 365 days prior to the trigger window. High grade dysplasia is identified based on the diagnosis in the input field Header Diagnosis Code (any field) listed in the configuration file under “High Grade Dysplasia”.
- *Quality Metric 1 Denominator* marks episodes which satisfy the following conditions
 - The output field Member Age has a value less than 26 years old, AND
 - The patient does not have a diagnosis of high grade dysplasia on a professional, outpatient, or inpatient claim assigned to the episode window or up to 365 days prior to the trigger window. High grade dysplasia is identified based on the

diagnosis in the input field Header Diagnosis Code (any field) listed in the configuration file under “High Grade Dysplasia”.

- *PAP Quality Metric 1* is expressed as a percentage for each Quarterback based on the following ratio:
 - Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 1 Indicator*
 - Denominator: Number of valid episodes of the *PAP ID* with *Quality Metric 1 Denominator*

■ **LEEP utilization with low-grade dysplasia (Quality Metric 2 – lower rate indicative of better performance):**

- *Quality Metric 2 Indicator* marks episodes that have both:
 - A professional or outpatient claim with a CPT procedure code for LEEP/conization as listed in the configuration file under “LEEP/Conization Episode” in the input field *Detail Procedure Code* assigned to the episode window. AND,
 - The absence of an ICD-10 diagnosis on the LEEP/conization procedure claim for high-grade dysplasia as listed in the configuration file under “CIN2/CIN3” in the input field *Header Procedure Code* during the episode window or up to 365 days before the episode or during the episode window.
- *Quality Metric 2 Denominator* marks episodes with a CPT procedure code for LEEP/conization as listed in the configuration file under “LEEP/Conization Episode” in the input field *Detail Procedure Code* assigned to the episode window.
- *PAP Quality Metric 2* is expressed as a percentage for each Quarterback based on the following ratio:
 - Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 2 Indicator*
 - Denominator: Number of valid episodes of the *PAP ID* with *Quality Metric 2 denominator*

Informational quality metrics (i.e., included for information only):

■ **Cervical cancer screening (Quality Metric 3 – higher rate indicative of better performance):**

- *Quality Metric 3 Indicator* marks episodes that have a CPT/HCPCS detail procedure code for cervical cancer screening on a hospitalization, professional or outpatient

claim as listed in the configuration file under “Cervical Cancer Screening” in the input field *Detail Procedure Code* up to 90 days prior to the episode.

- *PAP Quality Metric 3* is expressed as a percentage for each Quarterback based on the following ratio:
 - Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 3 Indicator*
 - Denominator: Number of valid episodes of the *PAP ID*

■ **Diagnostic colposcopy (Quality Metric 4 – lower rate indicative of better performance):**

- *Quality Metric 4 Indicator* marks episodes that have a colposcopy CPT code on a professional or outpatient claim assigned to the post-trigger window. Colposcopy is identified based on the input field *Detail Procedure Code* listed in the configuration file under “Diagnostic Colposcopy”.
- *PAP Quality Metric 4* is expressed as a percentage for each Quarterback based on the following ratio:
 - Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 4 Indicator*
 - Denominator: Number of valid episodes of the *PAP ID*

■ **LEEP utilization, trigger (Quality Metric 5 – rate not indicative of performance):**

- *Quality Metric 5 Indicator* marks episodes that have a LEEP or conization CPT code on a professional or outpatient claim assigned to the trigger window. LEEP or conization is identified based on the input field *Detail Procedure Code* listed in the configuration file under “LEEP/Conization Trigger”.
- *PAP Quality Metric 5* is expressed as a percentage for each Quarterback based on the following ratio:
 - Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 5 Indicator*
 - Denominator: Number of valid episodes of the *PAP ID*

■ **LEEP utilization, episode (Quality Metric 6 – rate not indicative of performance):**

- *Quality Metric 6 Indicator* marks episodes that have a LEEP or conization CPT code on a professional or outpatient claim assigned to the episode window. LEEP or conization is identified based on the input field *Detail Procedure Code* listed in the configuration file under “LEEP/Conization Episode”.

– *PAP Quality Metric 6* is expressed as a percentage for each Quarterback based on the following ratio:

- Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 6 Indicator*
- Denominator: Number of valid episodes of the *PAP ID*

■ **Difference in average MED/day (Quality Metric 7 – lower value indicative of better performance):**

– *Quality Metric Indicator 7* marks episodes where the difference between the average MED/day for the Post-trigger Opioid Window (minuend) and the average MED/day for the Pre-trigger Opioid Window (subtrahend) is less than or equal to zero.

– The minuend represents the average MED/day for the Post-trigger Opioid Window. The calculation is determined in a series of steps:

- First, Opioid Pharmacy Claims in the Post-trigger Opioid Window are identified as previously stated in the Post-trigger Opioid Window definition.
- Second, the total MED is calculated for each individual Opioid Pharmacy Claim identified in the previous step. For each claim, the total MED is calculated based on the formula below:

$$[\text{Total MED}] = [\text{MEQ/unit}] \times [\text{Quantity}].$$

The *MEQ/unit* is retrieved from an external opioid GSN conversion table (details to be provided by the State on how to access table) while the input field *Quantity* is identified on the Opioid Pharmacy Claim.

- Third, the average MED/day for the Post-Trigger Opioid Window is calculated by summing the total MED for each Opioid Pharmacy Claim in the Post-trigger Opioid Window and dividing by the number of days in the Post-trigger Opioid Window.
- The subtrahend represents the average MED/day for the Pre-trigger Opioid Window. The calculation is determined using the same methodology as that for the minuend except the Pre-trigger Opioid Window is used in place of the Post-trigger Opioid Window.

- Once both values are calculated the subtrahend is subtracted from the minuend.
- *PAP Quality Metric 7* is expressed as the number of valid episodes where the average difference in MED/day for each Quarterback is less than or equal to zero:
 - Numerator: Sum of *Quality Metric Indicator 7* across valid episodes of the *PAP ID*.
 - Denominator: Number of valid episodes of the *PAP ID*.
- **Average MED/day during the pre- trigger opioid window (Quality Metric 8 – value not indicative of performance):**
 - *Quality Metric Indicator 8* represents the average MED/day for the Pre-trigger Opioid Window. The calculation for *Quality Metric Indicator 8* is the same as that for the subtrahend of *Quality Metric Indicator 7*.
 - *PAP Quality Metric 8* is expressed as the average in MED/day for each Quarterback based on the following ratio:
 - Numerator: Sum of *Quality Metric Indicator 8* (average MED/day/episode during the Pre-trigger Opioid Window) across valid episodes of the *PAP ID*.
 - Denominator: Number of valid episodes of the *PAP ID*.
- **Average MED/day during the post-trigger opioid window (Quality Metric 9 – value not indicative of performance):**
 - *Quality Metric Indicator 9* represents the average MED/day for the Post-trigger Opioid Window. The calculation for *Quality Metric Indicator 3* is the same as that for the minuend of *Quality Metric Indicator 9*.
 - *PAP Quality Metric 9* is expressed as the average in MED/day for each Quarterback based on the following ratio:
 - Numerator: Sum of *Quality Metric Indicator 9* (average MED/day/episode during the Post-trigger Opioid Window) across valid episodes of the *PAP ID*.
 - Denominator: Number of valid episodes of the *PAP ID*.
- **Opioid and benzodiazepine prescriptions (Quality Metric 10 – lower rate indicative of better performance):**
 - *Quality Metric 10 Indicator* marks episodes that have both of the following conditions:
 - A pharmacy claim with a HIC3 code for an opioid assigned to the episode window. Pharmacy claims with HIC3 codes for specific medications are identified

by the presence of a NDC in the input field *National Drug Code*. To identify specific medications, the HIC3 codes must be cross-walked to NDCs. Since NDCs change over time, an updated crosswalk including current and historical NDCs must be used for each reporting period. The configuration file lists the opioid medication codes under “Opioids”; AND

- A pharmacy claim with a HIC3 code for a benzodiazepine assigned to the episode window. Pharmacy claims with HIC3 codes for specific medications are identified by the presence of a NDC in the input field *National Drug Code*. To identify specific medications, the HIC3 codes must be cross-walked to NDCs. Since NDCs change over time, an updated crosswalk including current and historical NDCs must be used for each reporting period. The configuration file lists the benzodiazepine medication codes under “Benzodiazepines”.
- *PAP Quality Metric 10* is expressed as a percentage for each Quarterback based on the following ratio:
 - Numerator: Number of valid episodes of the *PAP ID* with *Quality Metric 10 Indicator*
 - Denominator: Number of valid episodes of the *PAP ID*

5.9 CALCULATE GAIN/RISK SHARING AMOUNTS

This episode follows the process described in section 4.9.

6 Glossary

- **Claim types:** Claim type is defined as follows:

Claim type	Claim form	Type of Bill	HCPCS
Long-term care	UB-04	21x, 66x, 89x	
Home Health	UB-04	32x, 33x, 34x	
Inpatient	UB-04	11x, 12x, 18x, 41x, 86x	
Outpatient	UB-04	13x, 14x, 22x, 23x, 71x-77x, 79x, 83x-85x	
Transportation¹	CMS-1500		A0000 - A0999, G0240, G0241, P9603, P9604, Q0186, Q3017, Q3020, R0070, R0075, R0076, S0209, S0215, S9381, S9975, S9992, T2001 - T2007, T2049
DME²	CMS-1500		A4206 - B9999, C1000 - C9899, E0100 - E8002, G0025, J7341 - J7344, K0001 - K0899, P9044, Q0132, Q0160, Q0161, Q0182 - Q0188, Q0480 - Q0506, Q2004, Q3000 - Q3012, Q4001 - Q4051, Q4080, Q4100 - Q4116, Q9945 - Q9954, Q9958 - Q9968, S0155, S0196, S1001 - S1040, S3600, S4989, S5002, S5010 - S5025, S5160 - S5165, S5560 - S5571, S8002, S8003, S8060, S8095 - S8490, S8999, S9001, S9007, S9035, S9055, S9434, S9435, T1500, T1999, T2028, T2029, T2039, T2101, T4521 - T5999, V5336
Professional³	CMS-1500		
Pharmacy	NCPDP		

1. The entire claim is defined as transportation if one or more of the detail lines has one of these HCPCS codes.
2. The entire claim is defined as DME if one or more of the detail lines has one of these HCPCS codes.
3. Professional claims are defined as CMS-1500 claims not defined as transportation or DME.

- **Count of claims and claim detail lines by care category:** Based on the claim's care category, the claim count will either be at the claim level or at the claim detail level. Please note that total claim counts for an episode and summation of claim counts for all care categories will differ (summation of claim counts for all care categories is always going to be same or higher than claim counts for an episode) with this method. The breakdown is below.
 - Claim-specific care categories
 - Inpatient facility
 - Pharmacy
 - Claim detail line-specific care categories
 - Emergency department or observation
 - Outpatient facility
 - Inpatient professional
 - Outpatient laboratory
 - Outpatient radiology
 - Outpatient professional
 - Other
- **CPT:** Current Procedural Terminology
- **DBR:** Detailed Business Requirements
- **Duration of time windows:** The duration of a time window (e.g., the episode window, the trigger window), the duration of a claim or claim detail line, and the length of stay for inpatient stays is calculated as the last date minus the first date plus one (1). For example:

- A trigger window with a *Trigger Window Start Date* of January 1, 2014 and a *Trigger Window End Date* of January 1, 2014 has a duration of one (1) day.
- A trigger window with a *Trigger Window Start Date* of January 1, 2014 and a *Trigger Window End Date* of January 3, 2014 has a duration of three (3) days.
- A claim with a *Header From Date Of Service* of January 1, 2014 and a *Header To Date of Service* of January 2, 2014 has a duration of two (2) days.

■ **Episode window:** See sections 4.3 and 5.3.

■ **Exclusion hierarchy**

Hierarchy	Exclusion name	Exclusion used in report
1	Age	Patient below or above age thresholds
2	Inconsistent enrollment	Patient was not continuously enrolled during episode window
3	Third-party liability	Patient has third-party liability charges
4	Dual eligibility	Patient has dual coverage of primary medical services
5	Left against medical advice	Patient has a discharge status of “left against medical status”
6	Death	Patient died in the hospital during episode
7	Incomplete episodes	Episode data was incomplete
8	FQHC/RHC	Episodes for which the quarterback is an FQHC or RHC are excluded.
9	High outlier	Episode exceeds the high outlier threshold

10	Risk factor / comorbidity	Risk factor / comorbidity reference found
11	Overlapping episodes	At least one claim detail line overlaps between two episodes in scope that have the same Quarterback Tax Identification Number and patient. Lower ranking episode is excluded

- **HIC3:** Hierarchical Ingredient Code at the third level based on the classification system by First Databank
- **Hospitalization:** A hospitalization is defined as all the inpatient claims a patient incurs while being continuously hospitalized in one or more inpatient facilities. A hospitalization may include more than one inpatient claim because the inpatient facility may file interim inpatient claims and/or because the patient may be transferred between two or more inpatient facilities. A hospitalization consisting of just one inpatient claim starts on the *Header From Date Of Service* and ends on the *Header To Date Of Service* of the inpatient claim. A hospitalization where two or more inpatient claims are linked together starts on the *Header From Date Of Service* of the first inpatient claim and ends on the *Header To Date Of Service* of the last inpatient claim in the hospitalization. Inpatient claims are linked together into one hospitalization consisting of two or more inpatient claims if any of the following conditions apply:
 - Interim billing or reserved/missing discharge status: An inpatient claim with a *Patient Discharge Status* that indicates interim billing (see the configuration file under “Hospitalization – Interim Billing” for the codes used), that is reserved (see the configuration file under “Hospitalization – Reserved” for the codes used), or that is missing is linked with a second inpatient claim into one hospitalization if either of the following conditions apply:
 - There is a second inpatient claim with a *Header From Date Of Service* on the same day as or the day after the *Header To Date Of Service* of the first inpatient claim
 - There is a second inpatient claim with an *Admission Date* on the same day as the *Admission Date* of the first inpatient claim and also a *Header From Date Of Service*

on the same day as or within thirty (≤ 30) days after the *Header To Date Of Service* of the first inpatient claim

- Transfer: An inpatient claim with a *Patient Discharge Status* indicating a transfer (see the configuration file under “Hospitalization – Transfer” for the codes used) is linked with a second inpatient claim into one hospitalization if there is a second inpatient claim with a *Header From Date Of Service* on the same day as or the day after the *Header To Date Of Service* of the first inpatient claim.
- If the second inpatient claim (and potentially third, fourth, etc.) also has a *Patient Discharge Status* indicating interim billing, reserved, missing, or transfer the hospitalization is extended further until an inpatient claim with a discharge status other than interim billing, reserved, missing, or transfer occurs, or until the inpatient claim that follows does not satisfy the required conditions. If any claim has a *Patient Discharge Status* indicating discharge to home (see the configuration file under “Discharge To Home” for the codes used), the hospitalization is terminated.

- **ICD-10:** International Classification of Diseases, Tenth Revision
- **Member Age:** The output field *Member Age* reflects the patient’s age in years at the episode trigger. *Member Age* is calculated as the difference in years between the start of the claim that is used to set the *Professional Trigger Claim ID* or *Facility Trigger Claim ID* and the date of birth of the patient. The start of the claim is determined using the input field *Header From Date Of Service* for inpatient claims and the earliest *Detail From Date Of Service* across all claim detail lines for outpatient and professional claims. The date of birth of the patient is identified by linking the *Member ID* of the patient in the episode output table to the *Member ID* of the patient in the Member Extract and looking up the date in the input field *Date of Birth*. *Member Age* is always rounded down to the full year. For example, if a patient is 20 years and 11-months old at the start of the episode, the *Member Age* is set to 20 years. If the *Date of Birth* is missing, greater than (>) 100 years, or less than (<) 0 years, then the output field *Member Age* is treated as invalid.
- **PAP:** Principal Accountable Provider
- **Post-trigger window:** See sections See sections 4.3 and 5.3
- **Pre-trigger window:** See sections See sections 4.3 and 5.3
- **Reporting care categories:** The reporting care categories used, in hierarchical order, are:

Bill Form	Reporting Care Category	Definition	Additional Comments
UB-04	Inpatient facility	Bill Types: 11X, 12X, 18X, 41X, 86X	To include all services provided during an inpatient facility stay including room and board, recovery room, operating room, and other services.
UB-04	Emergency Department or Observation	Bill Types: 13X, 14X, 22X, 23X, 73X-77X, 79X, 83X-85X AND (Revenue code 045x, 0760, 0761, 0762, 0769 OR CPT 99281-99285, 99291-99293 OR Place of service = 23)	To include all services delivered in an Emergency Department or Observation Room setting including facility and professional services.
UB-04	Outpatient facility	Bill Types: 13X, 14X, 22X, 23X, 73X-77X, 79X, 83X-85X and NOT Emergency Department	To include all services delivered by a facility during an outpatient surgical encounter, including operating and recovery room and other services.
CMS-1500	Inpatient professional	Place of service = 21	To include services delivered by a professional provider during an inpatient hospital stay, including patient visits and

consultations,
surgery, and
diagnostic tests.

UB-04/CMS-1500	Outpatient laboratory	Place of service = 81 OR Revenue codes 030x OR CPT/HCPCS 80048-88399, G0306,G0307, G0431-G0434, G9143, P codes	To include all laboratory services in an inpatient, outpatient, or professional setting.
UB-04/CMS-1500	Outpatient radiology	Revenue code 035x, 061x, 040x, 032x OR CPT 70010-79999 or HCPCS C8906, C8903, C8907, C8904, C8908, C8905, S8042	To include all radiology services such as MRI, X-Ray, CT, and PET scan performed in an inpatient, outpatient, or professional setting.
CMS-1500	Outpatient professional	Any remaining, non-categorized CMS 1500 claims (excluding DME and transportation)	To include uncategorized professional claims such as evaluation and management, health screenings, and specialists visits.
UB-04/CMS-1500	Other	Any remaining, non-categorized claims	To include DME, transportation, home health, and any remaining uncategorized claims.
NCPDP post adjudication 2.0	Pharmacy		To include any pharmacy claims billed under the

pharmacy or medical benefit with a valid National Drug Code.

- **Total episodes:** All episodes, valid plus invalid
- **Trigger window:** See sections 4.3 and 5.3
- **Valid episodes:** See sections 4.6 and 5.6
- **Visit:** A visit is defined as all claim detail lines of professional claims for which the following conditions are met:
 - Same detail line start date
 - Same claim type
 - Same billing provider
 - Same rendering provider

Claim detail lines that have the same detail line start date, same claim type, a missing billing provider, and a missing rendering provider, are treated as part of the same visit.

The duration of a visit is defined as the minimum detail line start date to the maximum detail line end date of detail lines that are part of the visit.